

EVALUATION OF SEISMIC HAZARDS

Prepared by

I. M. Idriss
Department of Civil and Environmental Engineering
University of California
Davis, CA 95616-5294
e-mail: imidriss@aol.com

and

Ralph J. Archuleta
Institute for Crustal Studies
University of California
Santa Barbara, CA 93106-1100
e-mail: ralph@quake.crustal.ucsb.edu

Prepared for

Division of Dam Safety and Inspections
Office of Hydropower Licensing
Federal Energy Regulatory Commission
888 First Street, N.E.
Washington, D.C. 20426

May 2004

Draft 03

TABLE OF CONTENTS

	<u>Page</u>
1.0 INTRODUCTION	1
2.0 EARTHQUAKE HAZARDS AND CONSEQUENCES	
2.1 EARTHQUAKE HAZARDS	
2.1.1 Fault Rupture	
2.1.2 Earthquake Ground Motions	
2.1.3 Tsunamis	
2.1.4 Seiches	
2.2 CONSEQUENCES	
3.0 GEOLOGIC AND SEISMOLOGIC CONSIDERATIONS	2
3.1 HISTORICAL SEISMICITY	2
3.2 SEISMOGRAPHIC RECORD	3
3.3 GEOLOGIC STUDIES	3
3.3.1 Key Fault Parameters	6
3.3.1.1 Slip Rate	
3.3.1.2 Slip Per Event	
3.3.1.3 Earthquake Size	
3.3.1.3.1 Methods for Estimating Maximum Earthquake Magnitude	
3.3.1.3.2 Recurrence Interval of Significant Earthquakes	
3.4 EARTHQUAKE RECURRENCE MODELS	
4.0 SEISMIC HAZARD EVALUATION	
4.1 QUASI-DETERMINISTIC SEISMIC HAZARD EVALUATION	
4.1.2	
4.2 PROBABILISTIC SEISMIC HAZARD EVALUATION	
4.2.2	
5.0 GUIDELINES	
5.1 Required Geologic Studies	
5.2 Required Seismologic Studies	

5.3 Quasi-Deterministic Development of Earthquake Ground Motions

5.4 Probabilistic Development of Earthquake Ground Motions

5.5 Minimum Required Parameters for Controlling Events (s)

5.6 Selection of Applicable Accelerograms

6.0 REVIEW PROCESS

APPENDIX A
METHODS FOR ESTIMATING MAXIMUM EARTHQUAKE MAGNITUDE

APPENDIX B
PROBABILISTIC SEISMIC HAZARD ANALYSIS

APPENDIX C
ATTENUATION RELATIONSHIPS FOR MOTIONS IN WESTERN NORTH AMERICA
(WNA)

APPENDIX D
ATTENUATION RELATIONSHIPS FOR MOTIONS IN EASTERN NORTH AMERICA
(ENA)

APPENDIX E
ATTENUATION RELATIONSHIPS DERIVED BY YOUNGS, CHIOU, SILVA AND
HUMPHREY (1997) FOR HORIZONTAL SPECTRAL ACCELERATIONS (5% DAMPING)
FOR SUBDUCTION EARTHQUAKES AT A ROCK SITE

APPENDIX F
EFFECTS OF RUPTURE DIRECTIVITY ON EARTHQUAKE GROUND MOTIONS

APPENDIX G
HANGING WALL/FOOT WALL ON EARTHQUAKE GROUND MOTIONS

APPENDIX H
ESTIMATION OF TARGET SPECTRUM AT SPECTRAL DAMPING RATIOS OTHER
THAN 5%

APPENDIX I
ANALYTICAL SIMULATIONS TO GENERATE ACCELEROGRAMS AT A ROCK SITE

APPENDIX J
SELECTION OF ACCELEROGRAMS FOR SEISMIC ANALYSIS PURPOSES

APPENDIX K
INVENTORY OF SELECTED ACCELEROGRAMS

LIST OF TABLES

Table 1	Table 1 – Examples of Slip Rates
Table C-1	Coefficients for the Median Spectral Ordinates Using Equations Derived by Abrahamson and Silva (1997)
Table C-2	Coefficients for Standard Error Terms Using Equations Derived by Abrahamson and Silva (1997)
Table C-3	Coefficients Derived by Boore, Fumal and Joyner (1997)
Table C-4	Coefficients Derived by Campbell (1997)
Table C-5a	Coefficients for the Median Spectral Ordinates Using Equations Derived by Idriss (2002) for $M < 6$
Table C-5b	Coefficients for the Median Spectral Ordinates Using Equations Derived by Idriss (2002) for $M = 6$ to $M = 6.5$
Table C-5c	Coefficients for the Median Spectral Ordinates Using Equations Derived by Idriss (2002) for $M > 6.5$
Table C-6	Style of Faulting and Standard Error Coefficients for Spectral Ordinates Using Equations Derived by Idriss (2001)
Table C-7	Coefficients for Standard Error Terms Using Equations Derived by Sadigh et al (1997)
Table C-8	Coefficients for the Median Spectral Ordinates Using Equations Derived by Sadigh et al (1997)
Table D-1	Coefficients of Attenuation Equations Derived by Toro et al (1997)
Table D-2	Coefficients of Attenuation Equations Derived by Atkinson & Boore (1997)
Table E-1	Coefficients of Attenuation Equations Derived by Young et al (1997)

LIST OF FIGURES

- Fig. 1 Aerial View of San Andreas Fault near Palmdale Reservoir in Southern California (From Richter, 1958)
- Fig. 2 Log of Trench across Fault on which the 1968 Borrego Mountain, California, Earthquake Occurred (From Clark et al, 1972)
- Fig. 3 Schematic Illustration of Four Types of Faults
- Fig. 4 Relation between Moment Magnitude and Various Magnitude Scales (after Heaton et al, 1982)
- Fig. 5 Relationship between M and $m_{BL\theta}$
- Fig. 6 Location Map of the South Central Segment of the San Andreas Fault
- Fig. 7 Plot of Instrumental Seismicity Data for the Period of 1900 – 1980 Along the South Central Segment of the San Andreas Fault; the Box in the Figure Represents Range of Recurrence for $M = 7.5 - 8$, Based on Geologic Data (from Schwartz and Coppersmith, 1984)
- Fig. 8 Characteristic Earthquake Recurrence Model for South Central Segment of San Andreas Fault
- Fig. 9
- Fig. 10
- Fig. 11
- Fig. 12
- Fig. D-1 Regions Considered by Toro et al (1997) in Deriving Attenuation Relationships for Eastern North America (ENA)
- Fig. H-1 Spectral Shapes Using Relationships Proposed by Newmark & Hall (1981)
- Fig. H-2 Variations of Spectral Ordinates with Spectral Damping Ratio

EVALUATION OF SEISMIC HAZARDS

by

I. M. Idriss and Ralph J. Archuleta

1.0 INTRODUCTION

The Division of Dam Safety and Inspections of the Federal Energy Regulatory Commission (FERC) is responsible for the safety of power-generating stations throughout the USA. This responsibility includes concern with the effects of earthquakes at these stations, which typically include dams and appurtenant structures. Accordingly, FERC requested that the writers prepare this document on "Evaluation of Seismic Hazards" that contains the main elements that could be utilized by FERC to establish "Seismic Design Criteria" for all facilities under its jurisdiction.

The purpose of seismic design criteria is to provide guidelines and procedures for obtaining earthquake ground motion parameters for use in evaluating the seismic response of a given structure or facility. Presently, there are three ways by which the earthquake ground motion parameters can be ascertained: use of local building codes; conducting a quasi-deterministic seismic hazard evaluation; or conducting a probabilistic seismic hazard evaluation. Obviously, local building codes would not apply to the majority of structures under the jurisdiction of FERC. Both quasi-deterministic and probabilistic seismic hazard evaluations are covered in this document.

To provide the needed basis for estimating earthquake ground motion parameters at a particular site, it is necessary to incorporate the appropriate geologic and seismologic input and to utilize the most relevant available procedures for estimating these parameters. The remaining pages of this document cover these aspects and the attachments include more details regarding specific aspects of the seismic hazard evaluation procedures.

2.0 EARTHQUAKE HAZARDS AND CONSEQUENCES

2.1 EARTHQUAKE HAZARDS

2.1.1 Fault Rupture

2.1.2 Earthquake Ground Motions

2.1.3 Tsunamis

2.1.4 Seiches

2.2 CONSEQUENCES

3.0 GEOLOGIC AND SEISMOLOGIC CONSIDERATIONS

The geologic and seismologic inputs needed for estimating earthquake ground motions at a particular site consist of acquiring knowledge of the following key elements:

- (a) The seismic sources on which future earthquakes are likely to occur;
- (b) The size of the possible earthquakes and the frequency with which an earthquake is likely to occur on each source; and
- (c) The distance and orientation of each source with respect to the site.

This knowledge is obtained from the following sources of data in the region in which the site is located: (1) The historical seismicity record; (2) the seismographic, or instrumental, record of earthquake activity in the region; and (3) the geologic history, especially within the past few thousand to several hundred thousand years.

3.1 HISTORICAL SEISMICITY

An important first step in a seismic hazard evaluation is the compilation and documentation of the historical seismicity record pertinent to the region in which the site is located. It is essential in assessing this historical seismicity record that local sources of data (e.g., newspaper accounts, manuscripts written about a specific earthquake, etc.) be critically reviewed and that conflicting information be resolved. The historical seismicity record in the USA is relatively brief as it extends only over the past 200 to 400 years. It may be noted, however, that a good deal of the available historical records for many parts of the country have been compiled and can be accessed. It is also important to note that the historic seismicity record relies heavily (if not exclusively) on reports of felt ground motions or patterns of damage.

Important as the historical seismicity record is, however, it is not sufficient by itself to estimate the future seismic activity in a region.

3.2 SEISMOGRAPHIC RECORD

The seismographic, or instrumental, record in a region is also an important tool in a seismic hazard evaluation. Instrumental records augment the historical records by providing quantitative data (e.g., size, location, depth, and time of occurrence of earthquakes) that are not available from reports of felt ground motions or patterns of damage.

The seismographic record is available only since the year 1900 and, until recently, only from a limited number of stations in selected areas worldwide. Significant increases in the number of stations worldwide have been implemented in the past few years and it is expected that the usefulness of the seismographic record will continue to increase in the coming years.

3.3 GEOLOGIC STUDIES

In many parts of the world, significant earthquake activity is associated with faults. A major earthquake typically leaves a distinct geologic record which can be preserved for thousands, and possibly hundreds of thousands, of years. The faulting associated with an earthquake may displace soil and/or rock strata at shallow depths and may create a fault scarp that remains visible. An example of a fault scarps are shown in Figs. 1 and 2. Figure 1 is an aerial view of the San Andreas Fault, and Fig. 2 is the log of the trench across the fault on which the 1968 Borrego Mountain, California, earthquake occurred.

The preserved geologic features along faults can be investigated by geologic and geophysical studies that may include: review of available literature, especially with regard to structural and tectonic history; interpretation of various types of imagery to identify regional structures; reconnaissance of the geology and geomorphology of the region; and the use of trenching, boreholes, age-dating and geophysical techniques.



Fig. 1 Aerial View of San Andreas Fault near Palmdale Reservoir in Southern California (From Richter, 1958)

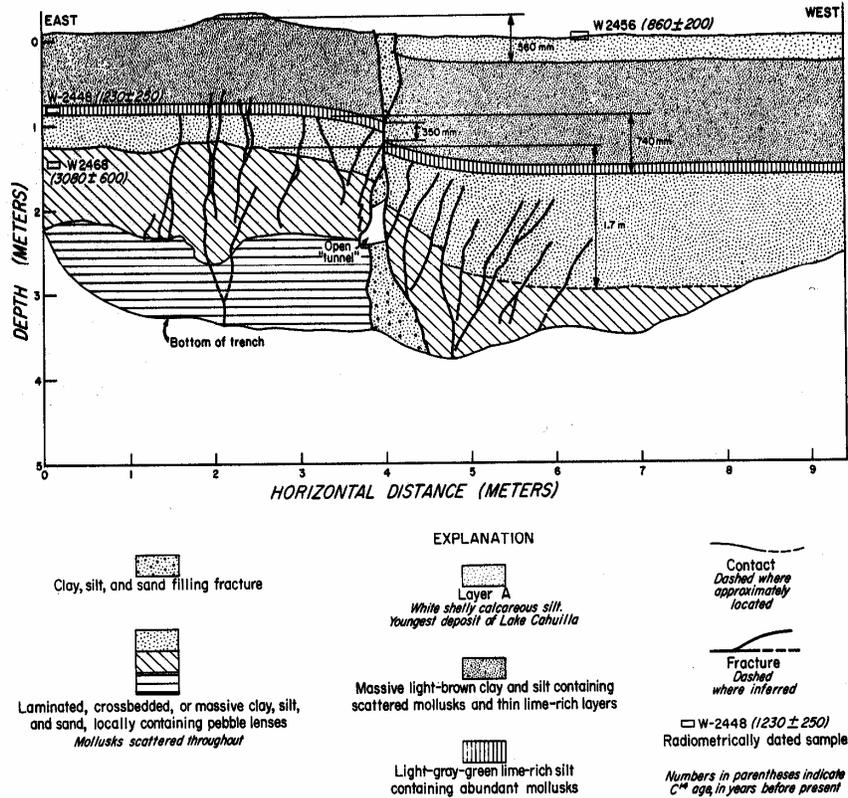


Fig. 2 Log of Trench across Fault on which the 1968 Borrego Mountain, California, Earthquake Occurred (From Clark et al, 1972)

There are various types of faults, as shown in Fig. 3. In a thrust (or a reverse) fault, the offset is along an inclined plane and occurs in response to a compressive tectonic strain environment as shown in Fig. 3a; examples of major earthquakes on such faults are the 1952 Kern County and the 1971 San Fernando earthquakes in California, and the 1999 Chi-Chi earthquake in Taiwan. The offset on a normal fault is also along an inclined plane, but it occurs in response to extensional strain (Fig. 3b); examples are the 1954 Dixie Valley, Nevada, and the 1959 Hebgen Lake, Montana, earthquakes. Offset along a strike slip fault is essentially lateral and occurs along a vertical, or near-vertical, plane as illustrated in Fig. 3c; examples are the 1906 San Francisco earthquake in Northern California and the 1992 Landers earthquake in Southern California. The types of faults illustrated in Figs. 3a, 3b and 3c are designated as crustal faults and the illustrations presented in the figure indicate that rupture had extended to the ground surface. Earthquakes have also occurred on crustal faults on which rupture did not extend to the ground surface; these faults are designated as "blind". Examples of earthquakes occurring on "blind" faults are the 1982 Coalinga, the 1987 Whittier-Narrows, and the 1994 Northridge earthquakes. The mechanism of each of these earthquakes was a thrust mechanism and the fault involved is designated as a "blind thrust".

Subduction zones (Fig. 3d) occur at the interface between tectonic plates; examples are the 1964 Alaska earthquake, the 1985 Chilean earthquake, and numerous earthquakes in Japan such the 2003 – earthquake off the eastern shore of Hokkaido Island.

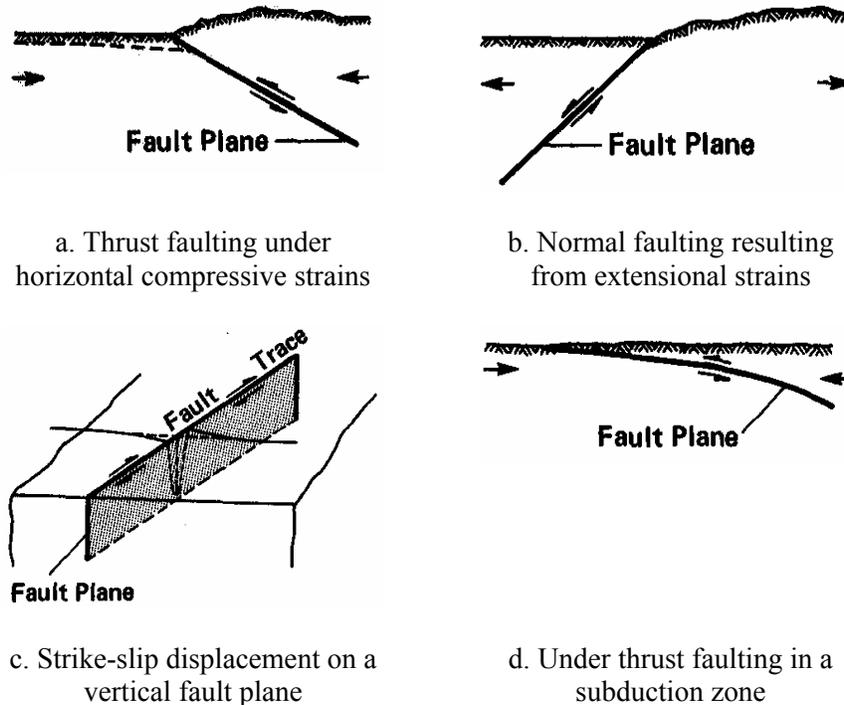


Fig. 3 Schematic Illustration of Four Types of Faults

Over the years, geologists and seismologists have studied the detailed characteristics of faults, and, until recently, designated each as being a potentially active fault or an inactive fault. This designation is based on recency of fault displacement, which leads to rigid legal definitions of fault activity based on a specified time criterion. Typically, the more critical the facility, the longer is the time criterion specified. For example, the US Nuclear Regulatory Commission considers, for nuclear plants, a fault active if it shows evidence of multiple displacements in the past 500,000 years, or evidence of a single displacement in the past 35,000 years. For dams, the US Bureau of Reclamation specifies 100,000 years, and the US Army Corps of Engineers uses 35,000 years. Faults that have had displacements within these time spans are considered active and those that have not had displacements are considered inactive.

Classifying faults as either "active" or "inactive" does not provide sufficient information about the nature of the fault. Instead, geologists and seismologists have recognized that significant differences exist in the degrees of activity of various faults. These differences are manifested by several key fault parameters, which are briefly described below.

3.3.1 Key Fault Parameters

The key fault parameters that appear most significant include: rate of strain release, or fault slip rate; amount of fault displacement in each event; length (and area) of fault rupture; earthquake size; and earthquake recurrence interval.

3.3.1.1 Slip Rate: The geologic slip rate provides a measure of the average rate of deformation on a fault. The slip rate is estimated by dividing the amount of cumulative displacement, measured from displaced geologic or geomorphic features, by the estimated age of the geological material or feature. The geologic slip rate is an average value over a geologic time period, and reliable to

the extent that strain accumulation and release over this time period has been uniform and responding to the same tectonic stress environment.

Examples of ranges of slip rates of a few selected faults are listed in Table 1.

Table 1 – Examples of Slip Rates

Fault	Slip Rate (mm/year)
Fairweather, Alaska	38 to 74
San Andreas, California	20 to 53
Hayward Fault, Northern California	7 to 11
Wasatch, Utah	0.9 to 1.8
Newport-Inglewood, Southern California	0.1 to 1.2
Atlantic Coast faults	0.0002

The information in Table 1 leads to the following observations: (i) prominent and highly active faults, such as the San Andreas Fault, have a much higher slip rate than minor faults; and (ii) uncertainties exist regarding the slip rate and a range of values needs to be considered in specific application. Observation (ii) pertains to various segments of the fault as well as to a specific segment of the fault.

3.3.1.2 Slip Per Event: The amount of fault displacement for each fault rupture event differs among faults and fault segments and provides another indication of relative differences in degrees of fault activity. The differences in displacement are influenced by the tectonic environment, fault type and geometry, pattern of faulting, and the amount of accumulated strain released.

The amount of slip per event can be directly measured in the field during studies of historical faulting, and is usually reported in terms of a maximum and an average value for the entire fault or for segments of the fault. Displacements for prehistoric rupture events can be estimated for some faults from detailed surface and subsurface seismic geologic investigations (e.g., Sieh, 1978; Swan et al, 1980).

It is often difficult to ascertain what value of maximum or average displacement is most accurate and representative from data available in the literature. Often, reported displacements represent apparent displacement or separation across a fault. For normal faulting events, scarp height has typically been reported as a measurement of the tectonic displacement. The scarp height, however, often exceeds the net tectonic displacement across a fault by as much as two times, due to graben formation and other effects near the fault (Swan et al, 1980). In the case of thrust faults, the reported vertical displacement often is actually the measure of vertical separation, and the net slip on the fault can be underestimated by a significant amount (e.g., Cluff and Cluff, 1984).

Thus, it is very important that the data base, from which displacements are determined, be carefully evaluated before selecting the best estimate of maximum or average displacement from data available in the literature.

3.3.1.3 Earthquake Size: The earliest measures of earthquake size were based on the maximum intensity and areal extent of perceptible ground shaking (most of the non-instrumental historical seismicity record is expressed in terms of these two observations). Instrumental recordings of

ground shaking led to the development of the magnitude scale (Richter, 1935). The magnitude was intended to represent a measure of the energy released by the earthquake, independent of the place of observation.

As stated by Richter (1958): "Magnitude was originally defined as the logarithm of the maximum amplitude on a seismogram written by an instrument of specific standard type at a distance of 100 km. ... Tables were constructed empirically to deduce from any given distance to 100 km. ... The zero of the scale is fixed arbitrarily to fit the smallest recorded earthquakes." Mathematically, the magnitude, M , is expressed as follows:

$$\text{Magnitude } M = \text{Log}_{10}(A) - \text{Log}_{10}(A_0) \quad [1]$$

in which A is the recorded trace amplitude for a given earthquake at a given distance as written by the standard type of instrument, and A_0 is that for a particular earthquake selected as standard. For local earthquakes, A and A_0 are measured in millimeters and the standard instrument is the Wood-Anderson torsion seismograph which has a natural period of 0.8 sec, a damping factor of 0.8 (i.e., 80 percent of critical) and static magnification of 2800. A magnitude determined in this way is designated the local magnitude, M_L .

For purposes of determining magnitudes for teleseisms, Gutenberg and Richter (1956) devised the surface wave magnitude, M_S , and the body wave magnitudes, m_b and m_B .

The local magnitude is determined at a period of 0.8 sec, the body wave magnitudes are determined at periods between 1 and 5 sec, and the surface wave magnitude is determined at a period of 20 sec.

In the past 25 or so years, the use of seismic moment has provided a physically more meaningful measure of the size of a faulting event. Seismic moment, in dyne-cm, is expressed by the equation:

$$M_o = \mu A_f D \quad [2]$$

In which μ is the shear modulus of the material along the fault plane and is typically equal to 3×10^{11} dyne/cm² for crustal rocks, A_f is the area, in square centimeters, of the fault plane undergoing slip, and D , in cm, is the average displacement over the slip surface.

Seismic moment provides a basic link between the dimensions of the fault and the seismic waves radiated due to rupturing along the fault. Seismic moment is therefore a more useful measure of the size of an earthquake

Kanamori (1977) and Hanks and Kanamori (1979) introduced a moment-magnitude scale, M , in which magnitude is calculated from seismic moment using the following formula:

$$\begin{aligned} \text{Log}_{10}(M_o) &= 1.5M + 16.05 \\ \text{or} \\ M &= (2/3)[\text{Log}_{10}(M_o) - 16.05] \end{aligned} \quad [3]$$

The moment magnitude is different from other magnitude scales because it is directly related to average slip and ruptured fault area, while the other magnitude scales reflect the amplitude of a particular type of seismic wave. The relationships between moment magnitude and the other magnitude scales, shown in Fig. 4, were presented by Heaton et al (1982) based on both empirical and theoretical considerations as well as previous work by others. The following observations can be made from the results shown in Fig. 4:

- (i). All magnitude scales exhibit a limiting value, or a saturation level, with increasing moment magnitude. Saturation appears to occur when the ruptured fault dimension becomes much larger than the wave length of seismic waves that are used in measuring the magnitude; Moment magnitude does not saturate because it is derived from seismic moment as opposed to an amplitude on a seismogram
- (ii). The local magnitude and the short-period body wave magnitude, m_b , are essentially equal to moment magnitude up to $M = 6$;
- (iii). The long period body-wave magnitude, m_B , is essentially equal to moment magnitude up to $M = 7.5$; and
- (iv). The surface wave magnitude, M_S , is essentially equal to moment magnitude in the range of $M = 6$ to 8.

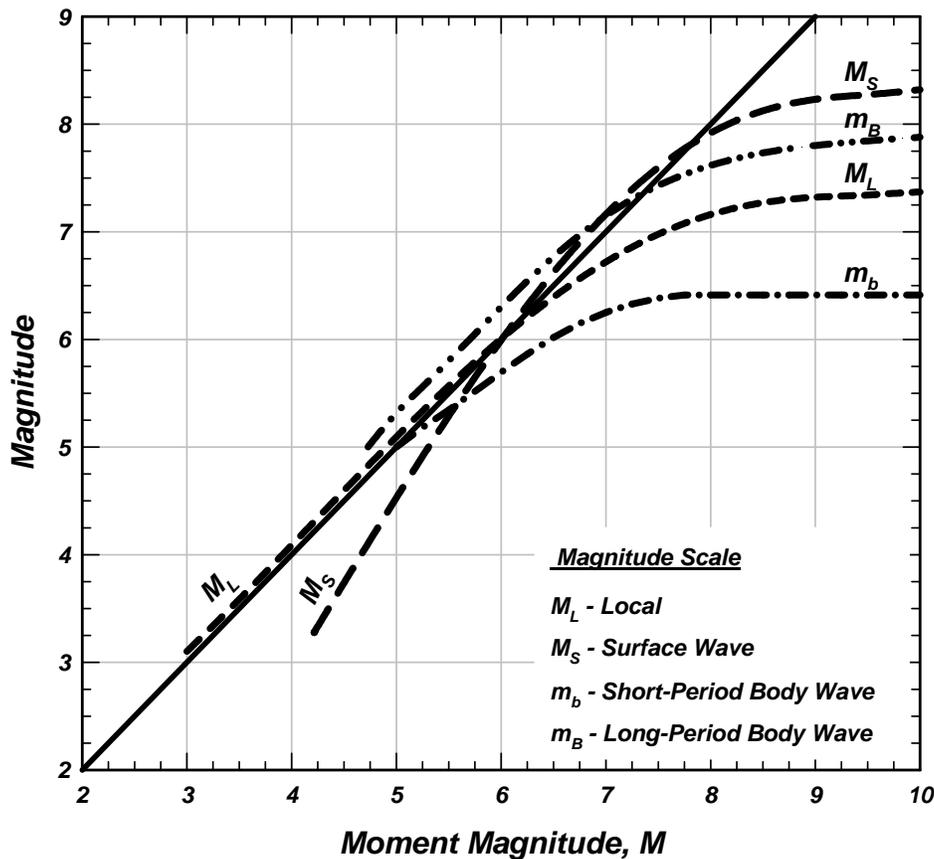


Fig. 4 Relation between Moment Magnitude and Various Magnitude Scales (after Heaton et al, 1982)

Typically, the size of an earthquake is reported in terms of local magnitude, surface wave magnitude, or body wave magnitude, or in terms of all these magnitude scales. Based on the observations made from Fig. 4, the use of local magnitude for magnitudes smaller than 6, and surface wave magnitude for magnitudes greater than 6 but less than 8 is equivalent to using the moment magnitude. For great earthquakes, such as the 1960 Chilean earthquake ($M = 9.5$) and the 1964 Alaska earthquake ($M = 9.2$), however, it is important to use the moment magnitude to express the size of the earthquake. In fact, it is best to use the moment magnitude scale for all events.

It should be noted that the magnitude derived using Eq. [3] is defined as the moment magnitude and given the designation M . This moment magnitude is devised in a way that it is equivalent to M_L for $3 < M_L < 6$. Another, slightly different magnitude is the energy magnitude, M_W , which is given by the following relationship:

$$\begin{aligned} \text{Log}_{10}(M_o) &= 1.5M + 16.1 \\ \text{or} \\ M_W &= (2/3)[\text{Log}_{10}(M_o) - 16.1] \end{aligned} \quad [4]$$

The magnitudes M and M_W are nearly equal, and have been used interchangeably in many applications.

The magnitude scale most often used for central and eastern US earthquakes is m_{bLg} , which was developed by Nuttli (1973a). It is based on measuring the maximum amplitude, in microns, of 1-sec period L_g waves and was devised to be equivalent to m_b . Nuttli initially called this magnitude m_b . To avoid confusion with the true m_b , however, this magnitude is usually referred to as m_{bLg} . It is also called Nuttli magnitude and designated m_N (Atkinson and Boore, 1987); it is referred to as such in the Canadian network.

Boore and Atkinson (1987) derived the following relationship between m_N and moment magnitude M :

$$M = 2.689 - 0.252m_N + 0.127(m_N)^2 \quad [4]$$

Frankel et al (1996) also derived a relationship between M and m_{bLg} , viz:

$$M = 2.45 - 0.473m_{bLg} + 0.145(m_{bLg})^2 \quad [5]$$

Equations [4] and [5] provide nearly identical values of M for the same values of m_{bLg} as illustrated in Figure 5.

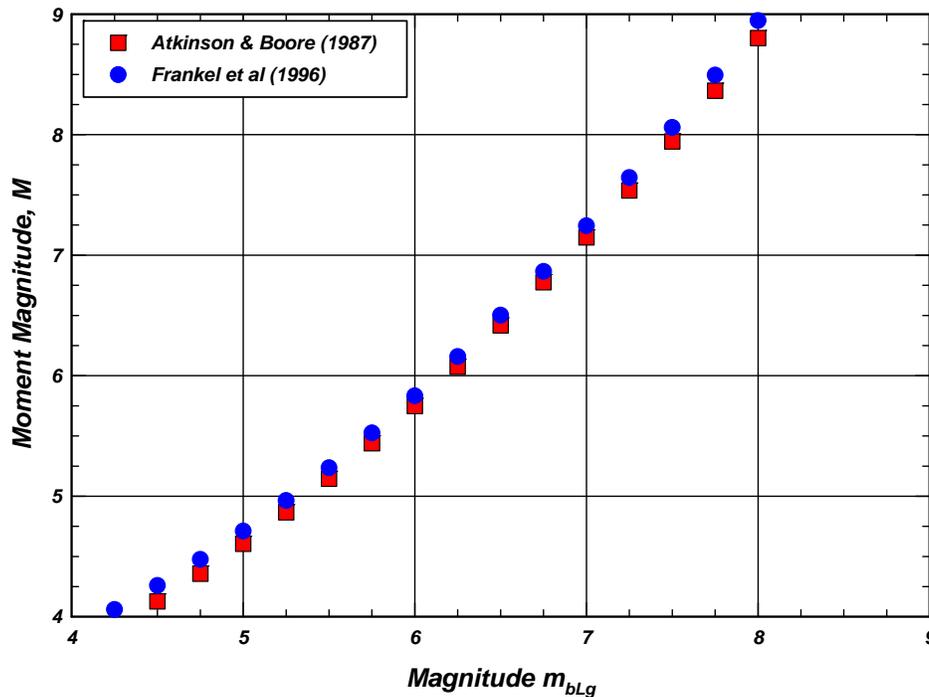


Fig. 5 Relationship between M and m_{bLg}

The use of magnitude or seismic moment as a criterion for the comparison of fault activity requires the choice of the magnitude or moment value that is characteristic of the fault. In many instances it is not possible to ascertain whether historical seismic activity is characteristic of the fault through geologic time, unless evidence of the sizes of past earthquakes is available from seismic geology studies of paleo-seismicity. As noted earlier, even a long historical seismic record is not enough by itself (Allen, 1975). In a few cases, detailed seismic geology studies have provided data on the sizes of past surface faulting earthquakes (e.g., Sieh, 1978). In general, these data involve measurements of prehistoric rupture length and/or displacement, and a derived magnitude can be estimated probably within one-half magnitude.

3.3.1.3.1 Methods for Estimating Maximum Earthquake Magnitude: There are several available methods for assigning a maximum earthquake magnitude to a given fault (e.g., Wyss, 1979; Slemmons, 1982; Schwartz et al, 1984; Wells and Coppersmith, 1994). These methods are based on empirical correlations between magnitude and some key fault parameter such as: fault rupture length and surface fault displacement measured following surface faulting earthquakes; and fault length and width estimated from studies of aftershock sequences. Data from worldwide earthquakes have been used in regression analyses of magnitude on length, magnitude on displacement, and magnitude on rupture area. In addition, magnitude can be calculated from seismic moment and a relationship between magnitude and slip rate has also been proposed. Each method has some limitations, which may include: non-uniformity in the quality of the empirical data, a somewhat limited data set, and a possible inconsistent grouping of data from different tectonic environments. A number of these methods are summarized in Appendix A.

Geological and seismological studies can define fault length, fault width, amount of displacement per event, and slip rate for potential earthquake sources. These data provide estimates of

maximum magnitude on each source. Selection of a maximum magnitude for each source is ultimately a judgment that incorporates understanding of specific fault characteristics, the regional tectonic environment, similarity to other faults in the region, and data on regional seismicity.

Use of a number of magnitude estimation methods can result in more reliable estimates of maximum magnitude than the use of any one single method. In this way, a wide range of fault parameters can be included and the selected maximum magnitude will be the estimate substantiated by the best available data. To evaluate the possible range of maximum magnitude estimates for a source, uncertainties in the fault parameters and in the magnitude relationships need to be identified and evaluated.

3.3.1.4 Recurrence Interval of Significant Earthquakes: Faults having different degrees of activity differ significantly in the average recurrence intervals of significant earthquakes. Comparisons of recurrence provide a useful means of assessing the relative activity of faults, because the recurrence interval provides a direct link between slip rate and earthquake size. Recurrence intervals can be calculated directly from slip-rate, as discussed later in this report, and displacement-per-event data. In some cases, where the record of instrumental seismicity and/or historical seismicity is sufficiently long compared to the average recurrence interval, seismicity data can be incorporated when estimating recurrence. In, many regions of the world, however, the instrumental as well as the historical seismicity record is too brief; some active faults have little or no historical seismicity and the recurrence time between significant earthquakes is longer than the available historical record along the fault of interest.

Plots of frequency of occurrence versus magnitude can be prepared for small to moderate earthquakes and extrapolations to larger magnitudes can provide estimates of the mean rate of occurrence of larger magnitude earthquakes. This technique has limitations, however, because it is based on regional seismicity, and often cannot result in reliable recurrence intervals for specific faults. The impact of such extrapolation on hazard evaluations is discussed in the following section.

3.4 EARTHQUAKE RECURRENCE MODELS

A key element in a seismic hazard evaluation is estimating recurrence intervals for various magnitude earthquakes. A general equation that describes earthquake recurrence may be expressed as follows:

$$N(m) = f(m, t) \quad [6]$$

in which $N(m)$ is the number of earthquakes with magnitude greater than or equal to m , and t is time. The simplest form of Eq. [6] that has been used in most applications is the well known Richter's law of magnitudes (Gutenberg and Richter, 1956; Richter, 1958) which states that the occurrence of earthquakes during a given period of time can be approximated by the relationship:

$$\text{Log}_{10}(N(m)) = a - bm \quad [7]$$

in which 10^a is the total number of earthquakes with magnitude greater than zero and b is the slope. This equation assumes spatial and temporal independence of all earthquakes, i.e., it has the properties of a Poisson Model.

For engineering applications, the recurrence is limited to a range of magnitudes between m^o and m^u . The magnitude m^o is the smallest magnitude of concern in the specific application; in most cases m^o can be limited to magnitude 5 because little or no damage has occurred from earthquakes with magnitudes less than 5. The magnitude m^u is the largest magnitude the fault is considered capable of producing; the value of m^u depends on the geologic and seismologic considerations summarized earlier. The cumulative distribution is then given by (...):

$$F_M(m) = P(M < m | (m^o \leq m \leq m^u)) \\ = \frac{N(m^o) - N(m)}{N(m^o) - N(m^u)} \quad [8]$$

The probability density function is equal to:

$$f_M(m) = \frac{d}{dm}(F_M(m)) \quad [9]$$

In Equations [6] through [9], the letters m or M refer to magnitude; the upper case M denotes a random variable, and the lower case m denotes a specific value of magnitude.

When the recurrence relationship is expressed by Richter's law of magnitudes, the following expression is obtained by substituting Eq. [7] into Eq. [8]:

$$N(m) = A^o \left\{ 1 - \frac{1 - 10^{-b(m-m^o)}}{1 - 10^{-b(m^u-m^o)}} \right\} \quad [10]$$

The parameter A^o is the number of events for earthquakes with magnitude greater than or equal to m^o (i.e., $\text{Log}_{10}(A^o) = a - bm^o$).

Development of Eq. [10] requires knowledge of the parameters A^o , b , and m^u , and a selection of m^o . The parameter A^o and slope b are based on either the historical seismicity record (including the instrumental record when available) or on geologic data. The slope b , based on regional historical seismicity records, typically ranges from 0.6 to about 1.1. For most faults, the historical seismicity record is relatively short and most of the information is for smaller magnitudes (typically less than 6). Thus, for these smaller magnitude earthquakes, a reasonable fit using Richter's relationship can be obtained and values of A^o and b can be calculated.

Discrepancies between earthquake recurrence intervals based on historical seismicity and recurrence intervals based on geologic data are common when applied to a specific fault.

A good example of such a discrepancy is found for the south central segment of the San Andreas fault, whose location is shown in Fig. 6. Schwartz and Coppersmith (1984) compiled the historical instrumental seismicity for the period 1900-1980 along this segment of the fault. Using these data, they developed the recurrence curve shown in Fig. 7, which is represented by the equation: $\text{Log}_{10}(N(m)) = 3.30 - 0.88m$. The instrumental historical seismicity data available

for this fault include earthquakes only up to magnitude $6\pm$. Also shown in Fig. 7 is a box that represents the estimate of recurrence for the magnitude range of 7.5 to 8 based on geologic data (e.g., Sieh, 1978). As can be noted from the plots in Fig. 7, if the line developed from historical seismicity is extrapolated to the magnitude range of 7.5 to 8, the recurrence for such magnitude earthquakes would be underestimated by a factor of about 15 compared to the recurrence estimated from geologic data.

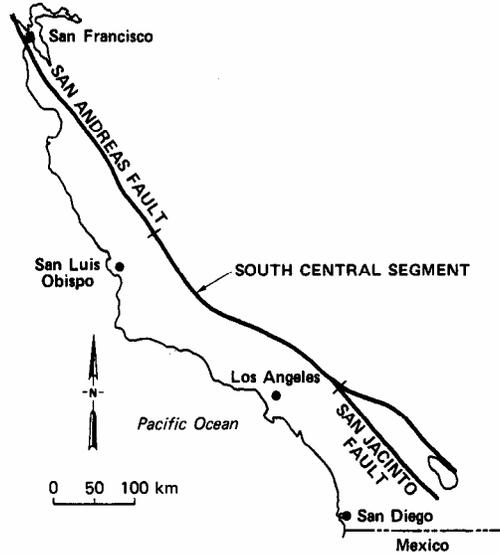


Fig. 6 Location of the South Central Segment of the San Andreas Fault

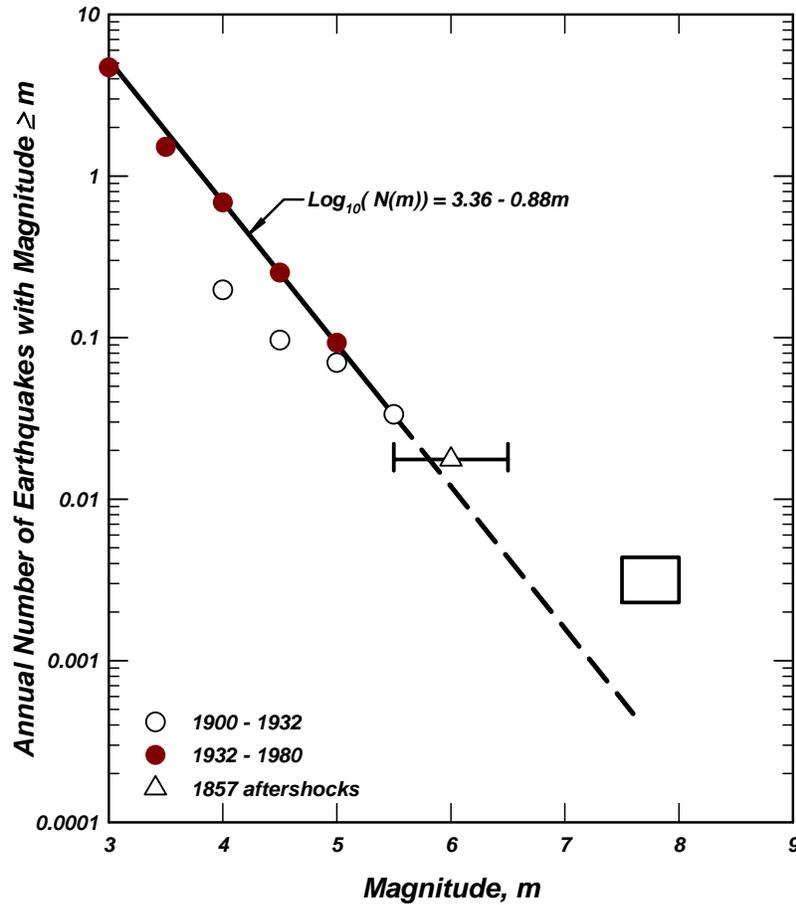


Fig. 7 Plot of Instrumental Seismicity Data for the Period of 1900 – 1980 along the South Central Segment of the San Andreas Fault; the Box in the Figure Represents Range of Recurrence for $M = 7.5 - 8$, Based on Geologic Data (from Schwartz and Coppersmith, 1984)

Molnar (1979) developed a procedure to calculate recurrences based on geologic slip rate and seismic moment (Eq. 2). The seismic moment rate \dot{M}_o^T , or the rate of energy release along a fault, as estimated by Brune (1968) is given by:

$$\dot{M}_o^T = \mu A_f S \quad [11]$$

And by Molnar (1979):

$$\dot{M}_o^T = \int_{m^o}^{m^u} n(m) M_o(m) dm \quad [12]$$

In which S is the average slip rate in cm/year and $n(m) = -dN(m)/dm$. Differentiating Eq. [10], substituting into Eq. [12], integrating and equating the results to Eq. [11] provides the following:

$$A^o = \frac{c-b}{b} \frac{(1-k)\mu A_r S}{kM_o^u - M_o^o} \quad [13]$$

In which $\text{Log}_{10}(M_o) = 1.5M + 16.05$, M_o^u and M_o^o are the seismic moments corresponding to m^u and m^o , respectively, and $k = 10^{-b(m^u - m^o)}$.

Equation [13] is also derived on the premise that slip takes place on the fault not only because of the occurrence of m^u , but also during earthquakes with smaller magnitudes, i.e., the strain accumulated along the fault is released through slip due to the occurrence of all magnitude earthquakes. Wesnousky et al (1983) suggest, based on data from Japan, that the accumulated strain on a fault is periodically released in earthquakes of only the maximum magnitude, m^u . Wesnousky et al formulated a recurrence model based on this premise, which they designate as the maximum magnitude recurrence model. The recurrence interval, T^u in years, for the maximum magnitude is the ratio of the seismic moment (Eq. 3) associated with the maximum magnitude divided by the seismic moment rate (Eq. 11); thus:

$$T^u = (1.5\text{Log}_{10}(m^u) + 16.05) / \mu A_r S \quad [14]$$

$$N(m^u) = 1/T^u$$

Earthquakes with magnitude ranging from m^o to $(m^u - x)$, which constitute foreshocks and aftershocks to the maximum earthquake, are assumed to obey Richter's recurrence model with a slope equal to the regional b . The value of x is typically equal to 1 to 1.5. Note that since the occurrence of earthquakes with less than or equal to $(m^u - x)$ is conditional on the occurrence of m^u , it follows that $N(m^u - x) = N(m^u)$.

Another model, which has been used in many applications, is the characteristic earthquake recurrence model (Schwartz and Coppersmith, 1984). This model uses Eq. [7] for the magnitude range m^o to an intermediate magnitude, m^i , with a slope based on historical or instrumental seismicity. The recurrence of m^u is evaluated from geologic data using Eq. [14]. The recurrence between the intermediate magnitude and the maximum magnitude using a relation similar to Eq. [7] but having a slope much smaller than the slope used for the magnitude range m^o to m^i . The characteristic recurrence model for the South Central Segment of the San Andreas fault is shown in Fig. 8.

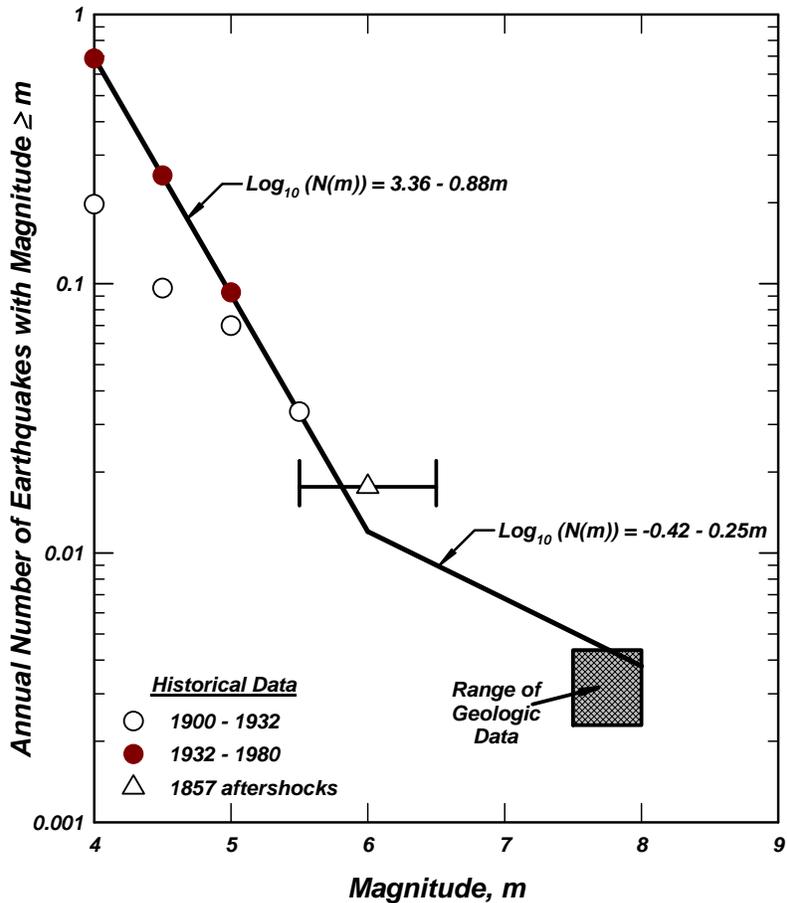


Fig. 8 Characteristic Earthquake Recurrence Model for South Central Segment of San Andreas Fault

4.0 SEISMIC HAZARD EVALUATION

The purpose of a seismic hazard evaluation is to arrive at earthquake ground motion parameters for use in evaluating the site and facilities at the site during seismic loading conditions. Coupled with the vulnerability of the site and the facilities under various levels of these ground motion parameters, the risk to which the site and the facilities may be subject can be assessed. Alternate designs, modifications, etc. can then be considered for the acceptable level of risk.

As noted earlier, there are three ways by which the earthquake ground motion parameters are obtained, namely: use of local building codes; conducting a quasi-deterministic seismic hazard evaluation; or conducting a probabilistic seismic hazard evaluation.

Local building codes contain a seismic zone map that includes minimum required seismic design parameters. Typically, local building codes are intended to mitigate collapse of buildings and loss of life, and not necessarily structural or architectural damage. Obviously, local building codes would not apply to the majority of structures under the jurisdiction of FERC.

4.1 QUASI-DETERMINISTIC SEISMIC HAZARD EVALUATION

In a quasi-deterministic evaluation, the current practice consists of the following steps:

- (a) A geologic and seismologic evaluation is conducted to define the sources (faults and /or seismic zones) relevant to the site;
- (b) The maximum magnitude, m^u , on each source is estimated and the closest distance to the site is determined;
- (c) Recurrence relationships for each source are derived using historical seismicity as well as geologic data and an earthquake with a magnitude $m_2 < m^u$ is selected for each source such that the recurrence $N(m_2)$ for $m \geq m_2$ is the same for all sources; if, for example, $N(m_2) = 0.005$ per year (i.e., a recurrence of 200 years) is used, this earthquake is then designated the "200-year" earthquake;
- (d) The needed earthquake ground motion parameters (e.g., accelerations, velocities, spectral ordinates, etc.) are calculated, using one or more attenuation relationship, or a analytical procedure, for the maximum earthquake and for the "200-year" earthquake from each source; and
- (e) The magnitude and distance producing the largest ground motion parameter for the maximum earthquake and for the "200-year" earthquake are then used for analysis and design purposes.

Note that the earthquake having the maximum magnitude (Step a) has often been designated the "maximum credible earthquake" or MCE. For critical structures, usually the MCE is used for selecting the earthquake ground motions. Attenuation relationships such as those summarized in Appendices C through F, are used to obtain the values of these motions. Typically, the median values obtained from these attenuation relationships are used when the seismic source has a relatively low degree of activity (e.g., average slip rate less than 0.1 mm/year). For high slip rate sources, the 84th-percentile values are used.

4.2 PROBABILISTIC SEISMIC HAZARD EVALUATION

A probabilistic seismic hazard evaluation (PSHE) involves obtaining, through a formal mathematical process, the level of a ground motion parameter that has a selected probability of being exceeded during a specified time interval. Typically, the annual probability of this level of the ground motion parameter being exceeded, λ , is calculated; the inverse of this annual probability is return period in years. Once this annual probability is obtained, the probability of this level of the ground motion parameter being exceeded over any specified time period can be readily calculated by:

$$P = 1 - \exp(-\lambda t) \quad [15]$$

in which P is the probability of this level of the ground motion parameter being exceeded in t years and λ is the annual probability of being exceeded.

It may be noted that the term return period has occasionally been misused to refer to recurrence interval. Recurrence interval (T in Eq. [14]) pertains to the occurrence of an earthquake on a

seismic source having magnitude m or greater, and return period ($1/\lambda$) is the inverse of the annual probability of exceeding a specific level of a ground motion parameter at a site.

A probabilistic seismic hazard evaluation at a site due to a particular source, n , involves convolving the following three probability functions (e.g., Cornell, 1968; Shah et al, 1975; McGuire, 1976; Der-Kiureghian and Ang, 1977; Kulkarni et al, 1979; Reiter, 1990):

- (a) The recurrence rate is used to calculate the probability that an earthquake of a particular magnitude will occur on this source during a specified time interval. This probability function is usually expressed in terms of the mean number of earthquakes, per annum, with magnitude m_i on source n .
- (b) The probability that the rupture surface is a specified distance from the site is assessed by considering both fault geometry and the magnitude-rupture length (or area) relationship.
- (c) The probability that the ground motions from an earthquake of a certain magnitude occurring at a certain distance will exceed a specified level at the site is based on the selected attenuation relationship, such as those summarized in Appendices C through F.

By combining the three probability functions for each source, the annual probability of exceeding a specified level of ground motion at the site, λ_n is computed. If there are N sources, then the above process is repeated for each source, and the contributions are added to obtain the total seismic hazard at the site, i.e., $\lambda = \sum \lambda_n$ for $n = 1$ to N .

The first probability function (i.e., mean number of earthquakes with magnitude m_i) is obtained from Eq. [9]. Der-Kiureghian and Ang's (1977) probability functions for distance are usually used; similar relationships have also been developed by Chiang et al (1984). Relationships such as those summarized in Appendix A for relating rupture length or rupture area to magnitude are utilized.

Thus, the advantages of using a probabilistic seismic hazard evaluation, over a quasi deterministic approach, include the following:

- (i). Contributions from earthquakes with $m = m^o$ to $m = m^u$ on each source are included;
- (ii). Contributions from all sources and all distances are included; and
- (iii). The results provide the means to select design parameters that can produce comparable degrees of risk at two or more sites.

5.0 GUIDELINES

These guidelines are provided in this document for FERC to establish the requirements for a seismic hazard evaluation at a particular site. The seismic design criteria for that site are then to be based on the results of such an evaluation.

5.1 REQUIRED GEOLOGIC STUDIES

The geologic studies required for a seismic hazard evaluation include the following:

Identify the faults in the region that may affect the dam site.

Special studies are required if a fault traverses or is suspected to traverse the dam or a critical appurtenant structure. Such studies may include imagery and trenching, as appropriate.

5.2 REQUIRED SEISMOLOGIC STUDIES

The seismologic studies required for a seismic hazard evaluation include the following:

Collect the historical as well as the instrumental records of seismic activity in the region.

5.3 QUASI-DETERMINISTIC DEVELOPMENT OF EARTHQUAKE GROUND MOTIONS

A quasi-deterministic should be conducted for the site to obtain the target spectrum for each source (identified in the geologic/seismologic studies) significant to the site. As noted in the text, the 84th percentile values are to be used for faults with high degree of fault activity, and the median values for those with a relatively low degree of fault activity (estimated slip rate less than 0.5 mm/year). The latest available attenuation relationships for estimating spectral ordinates at a rock site are to be used for this purpose. Several attenuation relationships should be considered, and the average used.

5.4 PROBABILISTIC DEVELOPMENT OF EARTHQUAKE GROUND MOTIONS

If sufficient information, or if a logic tree can be reasonably constructed, for the seismic sources that can affect the site, then a probabilistic seismic hazard analysis (PSHA) may be completed for the site. It is essential that the seismologic as well as the geologic data pertinent to each source be utilized in establishing the appropriate recurrence relationship for each source, and that a number of attenuation relationships be used for a number . The final selection of the

5.5 MINIMUM REQUIRED PARAMETERS FOR CONTROLLING EVENT(S)

The following ground motion parameters should be provided for each controlling event:

Magnitude of the earthquake and closest distance to site

Target peak acceleration and spectral ordinates for motions generated by this event at a rock outcrop at the site. The relevant attenuation relations listed in Appendices C through F are to be used for this purpose.

5.6 SELECTION OF APPLICABLE ACCELEROGRAMS

6.0 REVIEW PROCESS

This section is to be completed based on final discussions with FERC (maybe by reference to a new or existing directive).

6.0 REFERENCES

1. Abrahamson, N. A. and Shedlock, K. M. (1997) "Overview", *Seismological Research Letters*, Vol. 68, No. 1, January / February, pp 9-23.
2. Abrahamson, N. A. and W. J. Silva (1997) "Empirical Response Spectral Attenuation Relations for Shallow Crustal Earthquakes", *Seismological Research Letters*, Seismological Society of America, Vol. 68, No. 1, January 1997, pp 94-127.
3. Abrahamson, N. A. and Somerville, P. G. (1996) "Effects of the Hanging Wall and Footwall on Ground Motions during the Northridge Earthquake", *Bulletin of the Seismological Society of America*, Vol. 86, No. 1, January, pp 93-99.
4. Aki, K. (1967) "Scaling Law of Seismic Spectrum", *Journal of Geophysical Research*, Vol. 72, pp 1217-1231.
5. Aki, K. (1966) "Generation and Propagation of *G* waves from the Niigata Earthquake of June 16, 1964. Part II. Estimation of Seismic Moment, Released Energy and Stress-Strain Drop from the *G*-wave Spectrum", *Bulletin of the Earthquake Research Institute*, Tokyo University, Vol. 44, pp 73-88.
6. Allen, C. R. (1986) "Seismological and Paleo-Seismological Techniques of Research in Active Tectonics", *Active Tectonics*, National Academy Press, Washington, D.C., pp 148-154.
7. Anderson, J. G., and Hough, S. E. (1984) "A Model for the Shape of the Fourier Amplitude Spectrum of Acceleration at High Frequencies", *Bulletin of the Seismological Society of America*, Vol. 74, pp 1969-1993.
8. Arabasz, W. J., and Robinson, R. (1976) "Micro-Seismicity and Geologic Structure in the Northern South Island, New Zealand", *New Zealand Journal of Geology and Geophysics*, Vol. 19, pp 561-601.
9. Archuleta, R. J. (1984) "A Faulting Model for the Imperial Valley Earthquake", *Journal of Geophysical Research*, Vol. 89, pp 4559-4585.
10. Archuleta, R. J., and Hartzell, S. H. (1981) "Effects of Fault Finiteness on Near-Source Ground Motion", *Bulletin of the Seismological Society of America*, Vol. 71, pp 939-957.
11. Atkinson, G. M., and Boore, D. M. (1987) "On the m_n , *M* Relation for Eastern North American Earthquakes", *Seismological Research Letters*, Vol. 58, pp 119-124.
12. Atkinson, G. M. and Boore, D. M. (1997) "Stochastic Point-Source Modeling of Ground Motions in the Cascadia Region", *Seismological Research Letters*, Vol. 68, pp 24-40.
13. Benioff, H. (1955) "Mechanism and Strain Characteristics of the White Wolf Fault as Indicated by the Aftershock Sequence; Earthquakes in Kern County, California during 1955", *California Division of Mines Bulletin 171*, pp 199-202.

14. Benjamin, J. R. and Associates (1988) "A Criterion for Determining Exceedance of the Operating Basis Earthquake", EPRI Report NP-5930, Electrical Power Research Institute, Palo Alto, California.
15. Bernreuter, D. L., Savy, J. B., Mensing, R. W. and Chen, J. C. (1989) "Seismic Hazard Characterization of 69 Nuclear Power Plant Sites East of the Rocky Mountains", U. S. Nuclear Regulatory Commission, NUREG/CR-5250.
16. Bolt, B. A. (1969) "Duration of Strong Motions", Proceedings of the 4th World Conference on Earthquake Engineering, Santiago, Chile, pp 1304-1315.
17. Boore, D. M. (1983) "Stochastic Simulation of High-Frequency Ground Motions Based on Seismological Models of the Radiated Spectra", Bulletin of the Seismological Society of America, Vol. 73, pp 1865-1894.
18. Boore, D. M., and Atkinson, G. M. (1987) "Stochastic Prediction of Ground Motion and Spectral Response Parameters at Hard-Rock Sites in Eastern North America", Bulletin of the Seismological Society of America, Vol. 77, pp 440-467.
19. Brune, J. N. (1970) "Tectonic Stress and the Spectra of Seismic Shear Waves from Earthquakes", Journal of Geophysical Research, Vol. 75, pp 4997-5009. **Note:** Errata included in Journal of Geophysical Research, Vol. 76, pp 5002, 1971.
20. Campbell, K. W. (1997) "Empirical Near-Source Attenuation Relationships for Horizontal and Vertical Components of Peak Ground Acceleration, Peak Ground Velocity, and Pseudo-Absolute Acceleration Response Spectra", Seismological Research Letters, Vol. 68, No. 1, January / February, pp 154-179.
21. Coppersmith, K. J. (1991) "Seismic Source Characterization for Engineering Seismic Hazard Analysis", Proceedings of the Fourth International Seismic Zonation Conference, Vol. 1, pp 160.
22. Cornell, C. A. (1968) "Engineering Seismic Risk Analysis", Bulletin of the Seismological Society of America, Vol. 58, pp 1583-1606.
23. Cornell, C.A., and VanMarke, E. H. (1969), "The Major Influences on Seismic Risk", Proceedings of the Third World Conference on Earthquake Engineering, Santiago Chile, Vol. A-1, pp 69-93.
24. Der Kiureghian, A. and H. S. Ang, (1975) "A line source model for seismic risk analysis", Technical Report, Structural Research Series No. 419, Dept. of Civil Engineering, University of Illinois, Urbana, IL.
25. dePolo, C. M., and Slemmons, D. B. (1990) "Estimation of Earthquake Size for Seismic Hazards", in Krinitzky, E. L., and Slemmons, D. B., eds., Reviews in Engineering Geology, Vol. VIII, Neotectonics in Earthquake Evaluation, Geological Society of America, Boulder, CO, pp 1-28.
26. Dobry, R., Idriss, I. M., and Ng, E. (1978) "Duration Characteristics of Horizontal Components of Strong-Motion Earthquake Records", Bulletin of the Seismological Society of America, Vol. 68, No. 5, pp 1487-1520.

27. Electric Power Research Institute (EPRI) (1986) "Seismic hazard methodology for the central and eastern United States", Technical Report NP-4726A: EPRI, Palo Alto, California, Revised 1988, 10 volumes.
28. Earthquake Engineering Research Institute (EERI) Committee on Seismic Risk (1989) "The Basics of Seismic Risk Analysis", Earthquake Spectra, Vol. 5, pp 675-702.
29. Frankel, A., Mueller, C., Barnhard, T., Perkins, D., Leyendecker, E. V., Dickman, N., Hanson, S., and Hopper, M. (1996) "National Seismic-Hazard Maps", Documentation, U. S. Geological Survey, Open-File Report 96-532.
30. Gardner, J. K., and Knopoff, L. (1974) "Is the Sequence of Earthquakes in Southern California with Aftershocks Removed, Poissonian?", Bulletin of the Seismological Society of America, Vol. 64, pp 1363-1367.
31. Gutenberg, B., and Richter, C. R. (1944) "Seismicity of the Earth and Associated Phenomena", Princeton University Press, Princeton, New Jersey.
32. Hall, J. F., Heaton, T. H., Walling, M. W., and Wald, D. J. (1995) "Near-Source Ground Motions and its Effects on Flexible Buildings", Earthquake Spectra, Vol. 11, pp 569-605.
33. Hanks, T. C. (1982) " f_{max} ", Bulletin of the Seismological Society of America, Vol. 72, pp 1867-1879.
34. Hanks, T. C., and McGuire, R. K. (1981) "The Character of High Frequency Strong Ground Motion", Bulletin of the Seismological Society of America, Vol. 71, pp 2071-2095.
35. Hanks, T. C., and Kanamori, H. (1979) "A Moment Magnitude Scale", Journal of Geophysical Research, Vol. 84, pp 2348-2350.
36. Idriss, I. M. (1985) "Evaluating Seismic Risk in Engineering Practice", Proceedings, 11th International Conference on Soil Mechanics and Foundation Engineering, San Francisco, 12-16 August 1985, Vol. 1, pp 255 – 320.
37. Idriss, I. M. (1993) "Procedures for Selecting Earthquake Ground Motions at Rock Sites", Report No. NIST GCR 93-625, Report to National Institute of Standards & Technology, Gaithersburg, Maryland, Center for Geotechnical Modeling, Department of Civil & Environmental Engineering University of California at Davis.
38. Idriss, I. M. (1995) "An Overview of Earthquake Ground Motions Pertinent to Seismic Zonation", Proceedings, Fifth International Conference on Seismic Zonation, Nice, France, October 1995, Vol. III, pp
39. Johnston, A. C., Coppersmith, K. J., Kanter, L. R., and Cornell, C. A. (19xx) "The Earthquakes of Stable Continental Regions", Volume 1 of "Assessment of Large Earthquake Potential", Electric Power Research Institute (EPRI), TR-102261.
40. Joyner, W. B., and Boore, D. M. (1981) "Peak Acceleration and Velocity from Strong-Motion Records Including Records from the 1979 Imperial Valley, California, Earthquake", Bulletin of the Seismological Society of America, Vol. 71, pp 2011-2038.

41. Kanamori, H. (1977) "The Energy Release in Great Earthquakes", *Journal of Geophysical Research*, Vol. 82, pp 2981-2987.
42. Lilhanand, K., and Tseng, W. S. (1988) "Development and Application of Realistic Earthquake Time Histories Compatible with Multiple-Damping Design Spectra", *Proceedings of the Ninth World Conference on Earthquake Engineering*, Tokyo-Kyoto, Japan.
43. National Research Council (1988) "Probabilistic seismic hazard analysis", National Academy Press, Washington, DC.
44. Nuttli, O. W. (1973) "Seismic Wave Attenuation and Magnitude Relations for Eastern North America", *Journal of Geophysical Research*, Vol. 78, pp 876-885.
45. Midorikawa, S. (1993) "Preliminary Analysis for Attenuation of Peak Ground Velocity on Stiff Sites", *Proceedings, International Workshop on Strong Motion Data*, Vol. 2, Dec. 13-17, 1993, Menlo Park, California, Port and Harbor Research Institute, Japan, U. S. Geological Survey, Menlo Park, Ca.
46. Reiter, L. (1990) *Earthquake Hazard Analysis* Columbia University Press, New York.
47. Richter, C. F. (1935) "An Instrumental Earthquake Magnitude Scale", *Bulletin of the Seismological Society of America*, Vol. 25, pp 1-32.
48. Sadigh, K, C-Y. Chang, J. A. Egan, F. Makdisi, and R. R. Youngs, (1997) "Attenuation Relationships for Shallow Crustal Earthquakes Based on California Strong Motion Data", *Seismological Research Letters*, Seismological Society of America, Vol. 68, No. 1, January 1997, pp 180-189.
49. Schneider, J. F. (1993) "Guidelines for Determining Design Basis Ground Motions, Volume 1: Method and guidelines for Estimating Earthquake Ground Motion In Eastern North America", Electric Power Research Institute, Palo Alto, California.
50. Scholz, C. H. (1990) *The Mechanics of Earthquakes and Faulting* Cambridge University Press, Cambridge, 439 pp
51. Schwartz, D. P. (1988) "Geology and Seismic Hazards – moving into the 1990s", *Proceedings, Earthquake Engineering and Soil Dynamics II, Recent Advances in Ground Motion Evaluation*, American Society of Civil Engineers, Geotechnical Special Publication 20, pp 1-42.
52. Schwartz, D. P., and Coppersmith, K. J. (1984) "Fault Behavior and Characteristic Earthquakes from the Wasatch and San Andreas faults", *Journal of Geophysical Research*, Vol. 89, pp 5681 - 5698.
53. Seed, H. B., Ugas, C., and Lysmer, J., 1976, Site dependent spectra for earthquake-resistant design: *Bulletin of the Seismological Society of America*, Vol. 66, no. I, pp 221-244.
54. Senior Seismic Hazard Analysis Committee (SSHAC), 1995, *Recommendations for Probabilistic Seismic Hazard Analysis: Guidance on Uncertainty and Use of Experts*,

Lawrence Livermore National Laboratory Publication UCRL-ID-122160: U.S. Nuclear Regulatory Commission publication NUREG/CR-6372.

55. Sibson, R. ?, 19??
56. Silva, W. J., and Lee, K., 1987, WES RASCAL code for synthesizing earthquake ground motions Report 24, in *State-of-the Art for Assessing Earthquake Hazards in the United States: U.S.: U.S. Army Corps of Engineers, Waterways Experiment Station, Miscellaneous Papers S-73-1*, Vicksburg, Mississippi.
57. Singh, S. K., and Havskov, J., 1980, On moment-magnitude scale: *Bulletin of the Seismological Society of America*, Vol. 70, pp 379-383.
58. Somerville, P. G., Smith, N. F., Graves, R. W. and Abrahamson, N. A., 1997, Modification of empirical strong ground motion attenuation relations to include the amplitude and duration effects of rupture directivity: *Seismological Research Letters*, Vol. 68, pp 199-222.
59. SRL, 1997. *Seismological Research Letters*, Vol. 68.
60. Stepp, J.C., 1972, Analysis of the completeness of the earthquake hazard sample in the Puget Sound area and its effect on statistical estimates of earthquake hazard: *Proceedings of International Conference on Microzonation for Safer Construction, Research, and Application 2*, Seattle, Washington, pp 897-909.
61. Talwani, P., 1990, Neotectonics in the southeastern United States with emphasis on the Charleston, South Carolina, area; *in* Krinitzsky, E. L., and Slemmons, D. B., *Neotectonics in earthquake evaluation: Geological Society of America Reviews in Engineering Geology*, Vol. 8, pp 111-129.
62. Toro, G. R., Abrahamson, N., and Schneider, J. F., 1997, Model of strong ground motions from earthquakes in central and eastern North America: best estimates and uncertainties: *Seismological Research Letters*, Vol. 68, pp 58-73.
63. Trifunac, M. D. and Brady, A. G., 1975, On the correlation of seismic intensity with peaks of recorded strong motion, *Bulletin of the Seismological Society of America*, Vol. 65, pp 139-162.
64. Uhrhammer, R. A., 1986, Characteristics of northern and central California seismicity (abs.): *Earthquake Notes*, Vol. 57, n. 1, pp 21.
65. U.S. Army Corps of Engineers, 1995, Response spectra and seismic analysis for hydraulic structures: *Engineering Circular EC 1110-2-6050*.
66. Wells, D. L., and Coppersmith, K. J., 1994, New empirical relationships among magnitude, rupture length, rupture width, rupture area and surface displacement: *Bulletin of the Seismological Society of America*, Vol. 84, pp 974-1002.
67. Wesnousky, S., Scholz, C. H., Shinazaki, K., and Matsuda, T., 1983, Earthquake frequency distribution and mechanics of faulting: *Journal of Geophysical Research*, Vol. 88, pp 9331-9340.

68. Wesnousky, S. G., 1994, The Gutenberg-Richter or characteristic earthquake distribution, which is it?: Bulletin of the Seismological Society of America, Vol. 84, pp 1940-1959, and 1996, Reply to Yan Kagan's comment: Bulletin of the Seismological Society of America, Vol. 86, pp 286-291.
69. Wyss, M. (1979) "Estimating Maximum Expectable Magnitude of Earthquakes from Fault Dimensions," Geology, Vol. 7, No. 7, pp 336-340.
70. Youngs, R.R., and Coppersmith, K. J., 1985a, Development of a fault-specific recurrence model, Earthquake Notes (abs.) Vol. 56, no. 1, pp 16.
71. Youngs, R. R. and Coppersmith, K., 1985b, Implications of fault slip rates and earthquake recurrence models to probabilistic seismic hazard estimates: Bulletin of the Seismological Society of America, Vol. 75, pp 939-964.
72. Youngs, R.R., Coppersmith, K. J., Taylor, C. L., Power, M.S., DiSilvestro, L. A., Angell, M. M., Hall, N. T., Wesling, J. R., and Mualchin, L., 1993a, A comprehensive seismic hazard model for the San Francisco Bay Region, Proceedings of the Second Conference on Earthquake Hazards in the Eastern San Francisco Bay Area, March 25-29, 1992: California Division of Mines and Geology.
73. Youngs, R.R., Swan, F. H., Power, M.S., Schwartz, D. P., and Green, R. K., 1987, Probabilistic analysis of earthquake ground shaking hazard along the Wasatch front, Utah, in Assessment of Regional Earthquake Hazards and Risk Along the Wasatch Front, Utah, U.S.: U.S. Geological Survey Open-File Report 87-585, Vol. II, pp M-1-110.
74. Youngs, R.R., Swan, F. H., and Power, M.S., 1988, Use of detailed geologic data in regional probabilistic seismic hazard analysis -- an example from the Wasatch Front, Utah, in Earthquake Engineering and Soil Dynamics 11 -- Recent Advances in Ground Motion Evaluation: American Society of Civil Engineers Geotechnical Special Publication 20, pp 156-172.
75. Youngs, R. R., S. J. Chiou, W. L. Silva, and J. R. Humphrey (1997) "Strong Ground Motion Attenuation Relationships for Subduction Zone Earthquakes Based on Empirical Data and Numerical Modeling", Seismological Research Letters, Seismological Society of America, Vol. 68, No. 1, January 1997, pp 64-73.

APPENDIX A METHODS FOR ESTIMATING EARTHQUAKE MAGNITUDE

The magnitude of an earthquake has been related to surface rupture length, subsurface rupture length, rupture area, and to maximum as well as to average surface displacement. Wells and Coppersmith (1994) published the most recent compilation of available measurements of surface rupture length, rupture area, and surface displacement, and magnitude. They derived the following expressions relating magnitude to surface rupture length, rupture area, and surface displacement:

$$M = 5.08 + 1.16 \text{Log}_{10}(SRL) \quad [A-1]$$

$$M = 4.38 + 1.49 \text{Log}_{10}(RLD) \quad [A-2]$$

$$M = 4.07 + 0.98 \text{Log}_{10}(RA) \quad [A-3]$$

$$M = 6.69 + 0.74 \text{Log}_{10}(MD) \quad [A-4]$$

$$M = 6.93 + 0.82 \text{Log}_{10}(AD) \quad [A-5]$$

In which **M** is moment magnitude, **SRL** is surface rupture length in km, **RLD** is subsurface rupture length in km, **RA** is rupture area km², **MD** is maximum surface displacement in m, and **AD** is average surface displacement in m.

These expressions were derived by Wells and Coppersmith using measurements for crustal earthquakes generated by strike slip, reverse and normal faults, and suggested that these expressions are appropriate for most applications.

It is noteworthy that the expression relating magnitude to rupture area (Eq. A-3) has the least dispersion. It is also noteworthy that Wyss (1979) also derived an expression relating moment magnitude to rupture area using both crustal earthquakes as well as subduction events. The equation derived by Wyss is:

$$M = 4.15 + \text{Log}_{10}(RA) \quad [A-6]$$

Values of **M** obtained using Eq. A-3 are presented in Fig. A-1 together with those calculated using Eq. A-6. The value of moment magnitude calculated using the equation by Wyss is about 0.1 larger than that calculated using the equation by Wells & Coppersmith for small rupture areas (10s of km²), and about 0.15 for very large rupture areas (1000s of km²).

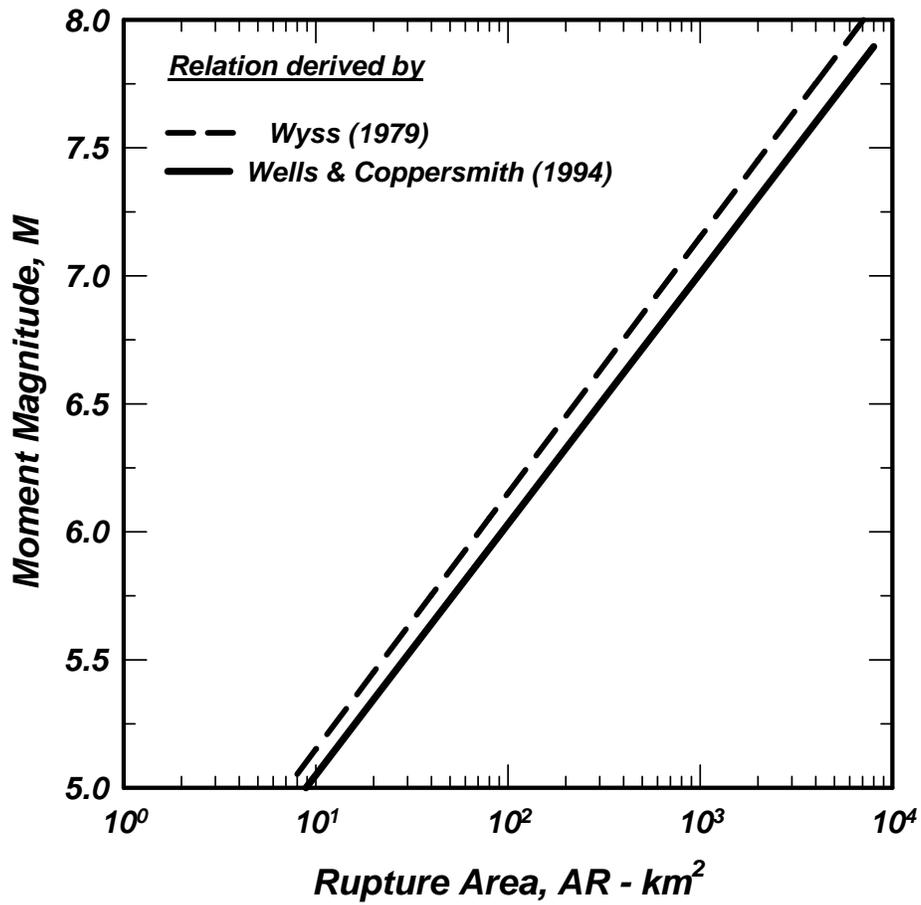


Fig. A-1 Comparison of Values of Moment Magnitude Calculated using Equations Derived by Wyss (1979) and by Wells & Coppersmith (1994)

APPENDIX B PROBABILISTIC SEISMIC HAZARD ANALYSIS

A probabilistic seismic hazard analysis (PSHA) is conducted for a site to obtain the probability of exceeding a given level of a ground motion parameter (e.g., acceleration, velocity, spectral acceleration ... etc). Typically, the annual probability of being exceeded is calculated; the inverse of this annual probability is defined as return period.

Three probability functions are calculated and combined to obtain the annual probability of exceeding a given ground motion parameter, \mathbf{S} . These probability functions are:

$\nu_n(\mathbf{m}_i)$: mean number of earthquakes (per annum) of magnitude \mathbf{m}_i occurring on source \mathbf{n} .

$p_{R_n/m_i}(r_j)$: given an earthquake of magnitude \mathbf{m}_i occurring on source \mathbf{n} , the probability that the distance to the source is r_j .

$G_{S/m_i,r_j}(\mathbf{z})$: probability that \mathbf{S} exceeds \mathbf{z} given an earthquake of magnitude \mathbf{m}_i occurring on source \mathbf{n} at a distance r_j .

The mean number (per annum) λ_n on source \mathbf{n} is then given by:

$$\lambda_n = \sum_i \sum_j \nu_n(\mathbf{m}_i) p_{R_n/m_i}(r_j) G_{S/m_i,r_j}(\mathbf{z})$$

If there are \mathbf{N} sources, then the annual probability of exceeding the value of \mathbf{z} is given by:

$$\lambda(\mathbf{z}) = \sum_{z=1}^{\mathbf{N}} \lambda_z(\mathbf{z})$$

and the average return period is given by $1/\lambda(\mathbf{z})$.

APPENDIX C
ATTENUATION RELATIONSHIPS FOR MOTIONS
IN WESTERN NORTH AMERICA (WNA)

The attenuation relationships derived by Abrahamson and Silva (1997), by Boore, Joyner and Fumal (1997), by Campbell (1997), by Idriss (2002), and by Sadigh et al (1997), are summarized in this Appendix.

C.1 ATTENUATION RELATIONSHIPS DERIVED BY ABRAHAMSON & SILVA (1997)

The functional form adopted by Abrahamson and Silva for spectral ordinates at rock sites is the following:

$$\ln(y) = f_1(M, r_{rup}) + Ff_3(M) + HWf_4(M, r_{rup}) \quad [C-1]$$

in which, y is the median spectral acceleration in g (5% damping), or peak ground acceleration (pga), in g's, M is moment magnitude, r_{rup} is the closest distance to the rupture plane in km, F is the fault type (1 for reverse, 0.5 for reverse/oblique, and 0 otherwise), and HW is a dummy variable for sites located on the hanging wall (1 for sites over the hanging wall, 0 otherwise). The function $f_1(M, r_{rup})$, is given by.

for $M \leq c_1$

$$f_1(M, r_{rup}) = a_1 + a_2(M - c_1) + a_{12}(8.5 - M)^n + [a_3 + a_{13}(M - c_1)] \ln(R) \quad [C-2]$$

for $M \geq c_1$

$$f_1(M, r_{rup}) = a_1 + a_4(M - c_1) + a_{12}(8.5 - M)^n + [a_3 + a_{13}(M - c_1)] \ln(R)$$

Note that $R = \sqrt{r_{rup}^2 + c_4^2}$ in Eq. [C-2].

The function $f_3(M)$ is described below:

$$\begin{aligned} f_3(M) &= a_5 && \text{for } M \leq 5.8 \\ f_3(M) &= a_5 + \frac{(a_6 - a_5)}{c_1 - 5.8} && \text{for } 5.8 < M < c_1 \\ f_3(M) &= a_6 && \text{for } M \geq c_1 \end{aligned} \quad [C-3]$$

The function $f_4(M, r_{rup})$ is assumed to consist of the product of the following two functions, namely:

$$f_4(M, r_{rup}) = f_{HW}(M) f_{HW}(r_{rup}) \quad [C-4]$$

The function $f_{HW}(M)$ is evaluated as follows:

$$\begin{aligned}
 f_{HW}(M) &= 0 && \text{for } M \leq 5.5 \\
 f_{HW}(M) &= M - 5.5 && \text{for } 5.5 < M < 6.5 \\
 f_{HW}(M) &= 1 && \text{for } M \geq 6.5
 \end{aligned}
 \tag{C-5}$$

The function $f_{HW}(r_{rup})$ is given by:

$$\begin{aligned}
 f_{HW}(r_{rup}) &= 0 && \text{for } r_{rup} < 4 \\
 f_{HW}(r_{rup}) &= a_9 \left(\frac{r_{rup} - 4}{4} \right) && \text{for } 4 < r_{rup} < 8 \\
 f_{HW}(r_{rup}) &= a_9 && \text{for } 8 < r_{rup} < 18 \\
 f_{HW}(r_{rup}) &= a_9 \left(1 - \frac{r_{rup} - 18}{7} \right) && \text{for } 18 < r_{rup} < 24 \\
 f_{HW}(r_{rup}) &= 0 && \text{for } r_{rup} < 25
 \end{aligned}
 \tag{C-6}$$

The standard error terms are given by the following equations:

$$\begin{aligned}
 \sigma_{total}(M) &= b_5 && \text{for } M \leq 5 \\
 \sigma_{total}(M) &= b_5 - b_6(M - 5) && \text{for } 5 < M < 7 \\
 \sigma_{total}(M) &= b_5 - 2b_6 && \text{for } M \geq 7
 \end{aligned}
 \tag{C-7}$$

Values of the coefficients a_1 .. a_6 , a_9 .. a_{13} , c_1 , c_4 , c_5 , and n are listed in Table C-1 for periods ranging from $T = 0.01$ sec (representing zpa) to $T = 5$ sec. Values of the coefficients b_5 and b_6 are listed in Table C-2 for the same periods.

Table C-1 Coefficients for the Median Spectral Ordinates Using Equations Derived by Abrahamson and Silva (1997)

Period	c_4	a_1	a_2	a_3	a_4	a_5	a_6	a_9	a_{10}	a_{11}	a_{12}
0.01	5.60	1.640	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.417	-0.230	0.0000
0.02	5.60	1.640	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.417	-0.230	0.0000
0.03	5.60	1.690	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.470	-0.230	0.0143
0.04	5.60	1.780	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.555	-0.251	0.0245
0.05	5.60	1.870	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.620	-0.267	0.0280
0.06	5.60	1.940	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.665	-0.280	0.0300
0.075	5.58	2.037	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.628	-0.280	0.0300
0.09	5.54	2.100	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.609	-0.280	0.0300
0.1	5.50	2.160	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.598	-0.280	0.0280
0.12	5.39	2.272	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.591	-0.280	0.0180
0.15	5.27	2.407	0.512	-1.1450	-0.144	0.610	0.260	0.370	-0.577	-0.280	0.0050
0.17	5.19	2.430	0.512	-1.1350	-0.144	0.610	0.260	0.370	-0.522	-0.265	-0.0040
0.2	5.10	2.406	0.512	-1.1150	-0.144	0.610	0.260	0.370	-0.445	-0.245	-0.0138
0.24	4.97	2.293	0.512	-1.0790	-0.144	0.610	0.232	0.370	-0.350	-0.223	-0.0238
0.3	4.80	2.114	0.512	-1.0350	-0.144	0.610	0.198	0.370	-0.219	-0.195	-0.0360
0.36	4.62	1.955	0.512	-1.0052	-0.144	0.610	0.170	0.370	-0.123	-0.173	-0.0460
0.4	4.52	1.860	0.512	-0.9880	-0.144	0.610	0.154	0.370	-0.065	-0.160	-0.0518
0.46	4.38	1.717	0.512	-0.9652	-0.144	0.592	0.132	0.370	0.020	-0.136	-0.0594
0.5	4.30	1.615	0.512	-0.9515	-0.144	0.581	0.119	0.370	0.085	-0.121	-0.0635
0.6	4.12	1.428	0.512	-0.9218	-0.144	0.557	0.091	0.370	0.194	-0.089	-0.0740
0.75	3.90	1.160	0.512	-0.8852	-0.144	0.528	0.057	0.331	0.320	-0.050	-0.0862
0.85	3.81	1.020	0.512	-0.8648	-0.144	0.512	0.038	0.309	0.370	-0.028	-0.0927
1	3.70	0.828	0.512	-0.8383	-0.144	0.490	0.013	0.281	0.423	0.000	-0.1020
1.5	3.55	0.260	0.512	-0.7721	-0.144	0.438	-0.049	0.210	0.600	0.040	-0.1200
2	3.50	-0.150	0.512	-0.7250	-0.144	0.400	-0.094	0.160	0.610	0.040	-0.1400
3	3.50	-0.690	0.512	-0.7250	-0.144	0.400	-0.156	0.089	0.630	0.040	-0.1726
4	3.50	-1.130	0.512	-0.7250	-0.144	0.400	-0.200	0.039	0.640	0.040	-0.1956
5	3.50	-1.460	0.512	-0.7250	-0.144	0.400	-0.200	0.000	0.664	0.040	-0.2150

The coefficients $a_{13} = 0.17$, $c_7 = 6.4$, $c_5 = 0.03$, and $n = 2$ for all periods.

Table C-2 Coefficients for Standard Error Terms Using Equations Derived by Abrahamson and Silva (1997)

Period - sec	b_5	b_6
0.01	0.70	0.135
0.02	0.70	0.135
0.03	0.70	0.135
0.04	0.71	0.135
0.05	0.71	0.135
0.06	0.72	0.135
0.075	0.73	0.135
0.09	0.74	0.135
0.1	0.74	0.135
0.12	0.75	0.135
0.15	0.75	0.135
0.17	0.76	0.135
0.2	0.77	0.135
0.24	0.77	0.135
0.3	0.78	0.135
0.36	0.79	0.135
0.4	0.79	0.135
0.46	0.80	0.132
0.5	0.80	0.130
0.6	0.81	0.127
0.75	0.81	0.123
0.85	0.82	0.121
1	0.83	0.118
1.5	0.84	0.110
2	0.85	0.105
3	0.87	0.097
4	0.88	0.092
5	0.89	0.087

C.2 ATTENUATION RELATIONSHIPS DERIVED BY BOORE, JOYNER AND FUMAL (1997)

The following equation was derived by Boore et al for spectral ordinates at rock sites:

$\ln(y) = b_1 + b_2(M - 6) + b_3(M - 6)^2 + b_5 \ln(r) + b_V \ln\left(\frac{V_S}{V_A}\right)$ $r = \sqrt{r_{jb}^2 + h^2}$	[C-8]
---	-------

$b_1 = \left\{ \begin{array}{l} b_{1SS} \\ b_{1RV} \\ b_{1ALL} \end{array} \right. \left. \begin{array}{l} \text{for strike-slip earthquakes} \\ \text{for reverse-slip earthquakes} \\ \text{if mechanism is not specified} \end{array} \right\}$	[C-9]
--	-------

The variable y is spectral acceleration (5% damping) in g's; M is moment magnitude, V_s is the average shear wave velocity (in m/sec) in the upper 30 m of the profile under consideration, V_A is reference shear wave velocity (in m/sec), and r_{jb} is the closest horizontal distance (in km) from the site to the surface projection of the source. Values of the coefficients b_{1SS} , b_{1RV} , b_{1ALL} , b_2 , b_3 , b_5 , b_V , V_A , and h (in km) are listed in Table C-3. Also listed in Table C-3 are the values of the standard error terms.

Table C-3
Coefficients Derived by Boore, Fumal and Joyner (1997)

Period	b_{1SS}	b_{1RV}	b_{1ALL}	b_2	b_3	b_5	b_V	V_A	h	SE
0	-0.313	-0.117	-0.242	0.527	0.000	-0.778	-0.371	1396	5.57	0.520
0.10	1.006	1.087	1.059	0.753	-0.226	-0.934	-0.212	1112	6.27	0.479
0.11	1.072	1.164	1.130	0.732	-0.230	-0.937	-0.211	1291	6.65	0.481
0.12	1.109	1.215	1.174	0.721	-0.233	-0.939	-0.215	1452	6.91	0.485
0.13	1.128	1.246	1.200	0.711	-0.233	-0.939	-0.221	1596	7.08	0.486
0.14	1.135	1.261	1.208	0.707	-0.230	-0.938	-0.228	1718	7.18	0.489
0.15	1.128	1.264	1.204	0.702	-0.228	-0.937	-0.238	1820	7.23	0.492
0.16	1.112	1.257	1.192	0.702	-0.226	-0.935	-0.248	1910	7.24	0.495
0.17	1.090	1.242	1.173	0.702	-0.221	-0.933	-0.258	1977	7.21	0.497
0.18	1.063	1.222	1.151	0.705	-0.216	-0.930	-0.270	2037	7.16	0.499
0.19	1.032	1.198	1.122	0.709	-0.212	-0.927	-0.281	2080	7.10	0.501
0.20	0.999	1.170	1.089	0.711	-0.207	-0.924	-0.292	2118	7.02	0.502
0.22	0.925	1.104	1.019	0.721	-0.198	-0.918	-0.315	2158	6.83	0.508
0.24	0.847	1.033	0.941	0.732	-0.189	-0.912	-0.338	2178	6.62	0.511
0.26	0.764	0.958	0.861	0.744	-0.180	-0.906	-0.360	2173	6.39	0.514
0.28	0.681	0.881	0.780	0.758	-0.168	-0.899	-0.381	2158	6.17	0.518
0.30	0.598	0.803	0.700	0.769	-0.161	-0.893	-0.401	2133	5.94	0.522
0.32	0.518	0.725	0.619	0.783	-0.152	-0.888	-0.420	2104	5.72	0.525
0.34	0.439	0.648	0.540	0.794	-0.143	-0.882	-0.438	2070	5.50	0.530
0.36	0.361	0.570	0.462	0.806	-0.136	-0.877	-0.456	2032	5.30	0.532
0.38	0.286	0.495	0.385	0.820	-0.127	-0.872	-0.472	1995	5.10	0.536
0.40	0.212	0.423	0.311	0.831	-0.120	-0.867	-0.487	1954	4.91	0.538
0.42	0.140	0.352	0.239	0.840	-0.113	-0.862	-0.502	1919	4.74	0.542
0.44	0.073	0.282	0.169	0.852	-0.108	-0.858	-0.516	1884	4.57	0.545
0.46	0.005	0.217	0.102	0.863	-0.101	-0.854	-0.529	1849	4.41	0.549
0.48	-0.058	0.151	0.036	0.873	-0.097	-0.850	-0.541	1816	4.26	0.551
0.50	-0.122	0.087	-0.025	0.884	-0.090	-0.846	-0.553	1782	4.13	0.556
0.55	-0.268	-0.063	-0.176	0.907	-0.078	-0.837	-0.579	1710	3.82	0.562
0.60	-0.401	-0.203	-0.314	0.928	-0.069	-0.830	-0.602	1644	3.57	0.569
0.65	-0.523	-0.331	-0.440	0.946	-0.060	-0.823	-0.622	1592	3.36	0.575
0.70	-0.634	-0.452	-0.555	0.962	-0.053	-0.818	-0.639	1545	3.20	0.582
0.75	-0.737	-0.562	-0.661	0.979	-0.046	-0.813	-0.653	1507	3.07	0.587
0.80	-0.829	-0.666	-0.760	0.992	-0.041	-0.809	-0.666	1476	2.98	0.593
0.85	-0.915	-0.761	-0.851	1.006	-0.037	-0.805	-0.676	1452	2.92	0.598
0.90	-0.993	-0.848	-0.933	1.018	-0.035	-0.802	-0.685	1432	2.89	0.604
0.95	-1.066	-0.932	-1.010	1.027	-0.032	-0.800	-0.692	1416	2.88	0.609
1.00	-1.133	-1.009	-1.080	1.036	-0.032	-0.798	-0.698	1406	2.90	0.613
1.10	-1.249	-1.145	-1.208	1.052	-0.030	-0.795	-0.706	1396	2.99	0.622
1.20	-1.345	-1.265	-1.315	1.064	-0.032	-0.794	-0.710	1400	3.14	0.629
1.30	-1.428	-1.370	-1.407	1.073	-0.035	-0.793	-0.711	1416	3.36	0.637
1.40	-1.495	-1.460	-1.483	1.080	-0.039	-0.794	-0.709	1442	3.62	0.643
1.50	-1.552	-1.538	-1.550	1.085	-0.044	-0.796	-0.704	1479	3.92	0.649
1.60	-1.598	-1.608	-1.605	1.087	-0.051	-0.798	-0.697	1524	4.26	0.654
1.70	-1.634	-1.668	-1.652	1.089	-0.058	-0.801	-0.689	1581	4.62	0.660
1.80	-1.663	-1.718	-1.689	1.087	-0.067	-0.804	-0.679	1644	5.01	0.664
1.90	-1.685	-1.763	-1.720	1.087	-0.074	-0.808	-0.667	1714	5.42	0.669
2.00	-1.699	-1.801	-1.743	1.085	-0.085	-0.812	-0.655	1795	5.85	0.672

C.3 ATTENUATION RELATIONSHIPS DERIVED BY CAMPBELL (1997)

The following equations were derived by Campbell for the median value of peak horizontal acceleration (A_H in g's) and the median value of horizontal spectral ordinates (SA_H in g's) for 5% spectral damping:

$$\begin{aligned}
 \ln(A_H) = & -3.512 + 0.904M \\
 & - 1.328 \ln \left\{ \sqrt{R_{SEIS}^2 + [0.149 \exp(0.647M)]^2} \right\} \\
 & + [1.125 - 0.112 \ln(R_{SEIS}) - 0.0957M] F \\
 & + [0.440 - 0.171 \ln(R_{SEIS})] S_{SR} \\
 & + [0.405 - 0.222 \ln(R_{SEIS})] S_{HR}
 \end{aligned} \tag{C-10}$$

$$\begin{aligned}
 \ln(SA_H) = & \ln(A_H) + c_1 + c_2 \tanh[c_3(M - 4.7)] \\
 & + (c_4 + c_5 M) R_{SEIS} + 0.5c_6 S_{SR} + c_6 S_{HR} \\
 & + c_7 \tanh(c_8 D)(1 - S_{HR}) + f_{SA}(D)
 \end{aligned} \tag{C-11}$$

In these equations, M is moment magnitude, and the source-to-site distance, R_{SEIS} , is the shortest distance between the recording site and the assumed zone of seismogenic rupture on the fault. Campbell indicates, based on the work of Marone and Scholz (1988), that the upper 2 to 4 km of the fault zone is typically non-seismogenic. The style of faulting variable, F , is equal to zero for strike slip faulting and is equal to unity for all other style of faulting. The parameters S_{SR} and S_{HR} define the local site conditions as follows:

$$S_{SR} = 1 \quad \& \quad S_{HR} = 0 \quad \text{for soft rock sites; and}$$

$$S_{SR} = 0 \quad \& \quad S_{HR} = 1 \quad \text{for hard rock sites.}$$

The parameter D is depth to basement rock below the site. The function $f_{SA}(D)$ is given by:

$$\begin{aligned}
 \text{For } D \geq 1 \text{ km} \\
 f_{SA}(D) = 0 \\
 \text{For } D < 1 \\
 f_{SA}(D) = c_6(1 - S_{HR})(1 - D) + 0.5c_6(1 - D)S_{SR}
 \end{aligned} \tag{C-12}$$

The values of the coefficients c_1, \dots, c_8 are provided in Table C-4.

Campbell derived relationships for the standard error of estimate of $\ln(A_H)$ as a function of mean predicted value of $\ln(A_H)$ and mean earthquake magnitude. Thus:

For $A_H < 0.068g$
 $SE = 0.55$ [C-13]

For $0.068g \leq A_H \leq 0.21g$
 $SE = 0.173 - 0.14\text{Ln}(A_H)$

For $A_H > 0.21g$
 $SE = 0.39$

For $M < 7.4$
 $SE = 0.889 - 0.0691M$ [C-14]

For $M \geq 7.4$
 $SE = 0.38$

Campbell suggests that Eq. C-13 is more statistically robust than Eq. C-14.

Table C-4
Coefficients Derived by Campbell (1997)

Period	C_1	C_2	C_3	C_4	C_5	C_6	C_7	C_8
0.05	0.05	0	0	-0.0011	0.000055	0.20	0	0
0.075	0.27	0	0	-0.0024	0.000095	0.22	0	0
0.1	0.48	0	0	-0.0024	0.000007	0.14	0	0
0.15	0.72	0	0	-0.0010	-0.00027	-0.02	0	0
0.2	0.79	0	0	0.0011	-0.00053	-0.18	0	0
0.3	0.77	0	0	0.0035	-0.00072	-0.40	0	0
0.5	-0.28	0.74	0.66	0.0068	-0.001	-0.42	0.25	0.62
0.75	-1.08	1.23	0.66	0.0077	-0.001	-0.44	0.37	0.62
1	-1.79	1.59	0.66	0.0085	-0.001	-0.38	0.57	0.62
1.5	-2.65	1.98	0.66	0.0094	-0.001	-0.32	0.72	0.62
2	-3.28	2.23	0.66	0.0100	-0.001	-0.36	0.83	0.62
3	-4.07	2.39	0.66	0.0108	-0.001	-0.22	0.86	0.62
4	-4.26	2.03	0.66	0.0112	-0.001	-0.30	1.05	0.62

C.4 ATTENUATION RELATIONSHIPS DERIVED BY IDRIS (2002)

The following equation was derived by Idriss for spectral ordinates at rock sites:

$$\ln(y) = (\alpha_1 + \alpha_2 M) - (\beta_1 + \beta_2 M) \ln(R + 10) + \phi F \quad [C-15]$$

y is the median spectral acceleration in g (5% damping), or peak ground acceleration (pga), in g's, M is moment magnitude, R is the closest distance to the rupture plane in km, F is the fault type (1 for reverse and reverse/oblique, and 0 otherwise), and $\alpha_1, \alpha_2, \beta_1, \beta_2$ are coefficients, whose values are listed in Table C-5a, C-5b; and C-5c. Table 5a provides values of these coefficients for $M < 6$. Values for $M = 6$ to $M = 6.5$ are listed in Table 5b, and those for $M > 6.5$ in table 5c.

Standard error terms are obtained using the following expressions:

$$SE = \left\{ \begin{array}{ll} \varepsilon_{max} & \text{for } M \leq 5 \\ \varepsilon_1 - 0.12M & \text{for } 5 \leq M \leq 7\frac{1}{4} \\ \varepsilon_{min} & \text{for } M \geq 7\frac{1}{4} \end{array} \right\} \quad [C-16]$$

The values of $\phi, \varepsilon_1, \varepsilon_{min}$, and ε_{max} are listed in Table C-6.

Table C-5a Coefficients for the Median Spectral Ordinates Using Equations
Derived by Idriss (2002) for $M < 6$

Period - sec	α_1	α_2	β_1	β_2
$M < 6$				
0.01	2.5030	0.1337	2.8008	-0.1970
0.03	2.5030	0.1337	2.8008	-0.1970
0.04	2.9873	0.0290	2.7850	-0.2081
0.05	3.2201	0.0099	2.7802	-0.2092
0.06	3.2988	0.0187	2.7784	-0.2083
0.07	3.2935	0.0378	2.7777	-0.2072
0.075	3.2702	0.0489	2.7774	-0.2068
0.08	3.2381	0.0606	2.7773	-0.2065
0.09	3.1522	0.0845	2.7770	-0.2061
0.1	3.0467	0.1083	2.7767	-0.2060
0.11	2.9308	0.1316	2.7763	-0.2061
0.12	2.8093	0.1541	2.7759	-0.2063
0.13	2.6859	0.1758	2.7754	-0.2066
0.14	2.5579	0.1966	2.7748	-0.2070
0.15	2.4301	0.2166	2.7741	-0.2074
0.16	2.3026	0.2357	2.7733	-0.2079
0.17	2.1785	0.2541	2.7724	-0.2083
0.18	2.0543	0.2718	2.7714	-0.2088
0.19	1.9324	0.2888	2.7704	-0.2092
0.2	1.8129	0.3051	2.7693	-0.2096
0.22	1.5794	0.3360	2.7668	-0.2105
0.24	1.3575	0.3646	2.7641	-0.2112
0.25	1.2490	0.3782	2.7626	-0.2116
0.26	1.1435	0.3913	2.7611	-0.2119
0.28	0.9381	0.4161	2.7580	-0.2126
0.3	0.7437	0.4394	2.7548	-0.2132
0.32	0.5553	0.4612	2.7514	-0.2137
0.34	0.3755	0.4816	2.7480	-0.2143
0.35	0.2883	0.4914	2.7462	-0.2145
0.36	0.2049	0.5008	2.7445	-0.2147
0.38	0.0362	0.5190	2.7410	-0.2152
0.4	-0.1223	0.5361	2.7374	-0.2156
0.45	-0.4985	0.5749	2.7285	-0.2167
0.5	-0.8415	0.6091	2.7197	-0.2176
0.55	-1.1581	0.6393	2.7112	-0.2185
0.6	-1.7051	0.7087	2.7030	-0.2194
0.7	-1.9821	0.7127	2.6878	-0.2211
0.8	-2.4510	0.7514	2.6742	-0.2228
0.9	-2.8715	0.7847	2.6624	-0.2244
1	-3.2511	0.8139	2.6522	-0.2259
1.5	-4.7813	0.9288	2.6206	-0.2326
2	-5.9481	1.0246	2.6097	-0.2368
3	-7.7976	1.2121	2.6086	-0.2385
4	-9.3398	1.4047	2.6012	-0.2336
5	-10.7364	1.5973	2.5703	-0.2250

Table C-5b Coefficients for the Median Spectral Ordinates Using Equations
Derived by Idriss (2002) for $M = 6$ to $M = 6.5$

Period - sec	α_1	α_2	β_1	β_2
$M = 6$ to $M = 6.5$				
0.01	4.3387	-0.1754	3.2564	-0.2739
0.03	4.3387	-0.1754	3.2564	-0.2739
0.04	3.9748	-0.1244	3.0378	-0.2468
0.05	3.9125	-0.0972	2.9689	-0.2381
0.06	3.8984	-0.0777	2.9481	-0.2355
0.07	3.8852	-0.0613	2.9448	-0.2352
0.075	3.8748	-0.0536	2.9458	-0.2354
0.08	3.8613	-0.0462	2.9477	-0.2358
0.09	3.8249	-0.0319	2.9527	-0.2367
0.1	3.7774	-0.0181	2.9578	-0.2376
0.11	3.7206	-0.0046	2.9623	-0.2385
0.12	3.6562	0.0086	2.9659	-0.2393
0.13	3.5860	0.0215	2.9685	-0.2401
0.14	3.5111	0.0341	2.9703	-0.2407
0.15	3.4327	0.0464	2.9712	-0.2412
0.16	3.3515	0.0586	2.9713	-0.2416
0.17	3.2683	0.0704	2.9708	-0.2420
0.18	3.1837	0.0821	2.9697	-0.2423
0.19	3.0980	0.0934	2.9681	-0.2425
0.2	3.0117	0.1046	2.9660	-0.2426
0.22	2.8382	0.1263	2.9608	-0.2428
0.24	2.6648	0.1471	2.9544	-0.2428
0.25	2.5786	0.1572	2.9509	-0.2428
0.26	2.4929	0.1671	2.9472	-0.2427
0.28	2.3231	0.1863	2.9393	-0.2425
0.3	2.1559	0.2049	2.9310	-0.2423
0.32	1.9916	0.2228	2.9224	-0.2419
0.34	1.8306	0.2400	2.9135	-0.2416
0.35	1.7512	0.2484	2.9091	-0.2414
0.36	1.6728	0.2567	2.9045	-0.2412
0.38	1.5183	0.2728	2.8955	-0.2407
0.4	1.3671	0.2883	2.8864	-0.2403
0.45	1.0036	0.3251	2.8639	-0.2391
0.5	0.6598	0.3591	2.8419	-0.2379
0.55	0.3347	0.3906	2.8206	-0.2367
0.6	0.0271	0.4200	2.8002	-0.2356
0.7	-0.5407	0.4729	2.7624	-0.2334
0.8	-1.0522	0.5193	2.7283	-0.2315
0.9	-1.5147	0.5603	2.6980	-0.2298
1	-1.9343	0.5966	2.6712	-0.2284
1.5	-3.5364	0.7255	2.5803	-0.2246
2	-4.5538	0.7945	2.5443	-0.2252
3	-5.5133	0.8254	2.5790	-0.2354
4	-5.5624	0.7672	2.7072	-0.2537
5	-5.0154	0.6513	2.8979	-0.2773

Table C-5c Coefficients for the Median Spectral Ordinates Using Equations
Derived by Idriss (2002) for $M > 6.5$

Period - sec	α_1	α_2	β_1	β_2
$M > 6.5$				
0.01	6.5668	-0.5164	3.2606	-0.2740
0.03	6.5668	-0.5164	3.2606	-0.2740
0.04	6.1747	-0.4717	3.0156	-0.2461
0.05	6.2734	-0.4675	2.9671	-0.2400
0.06	6.4228	-0.4696	2.9677	-0.2396
0.07	6.5418	-0.4704	2.9791	-0.2406
0.075	6.5828	-0.4698	2.9850	-0.2413
0.08	6.6162	-0.4685	2.9904	-0.2419
0.09	6.6541	-0.4642	2.9989	-0.2429
0.1	6.6594	-0.4580	3.0044	-0.2437
0.11	6.6436	-0.4504	3.0071	-0.2442
0.12	6.6084	-0.4419	3.0077	-0.2446
0.13	6.5639	-0.4328	3.0067	-0.2448
0.14	6.5085	-0.4233	3.0044	-0.2448
0.15	6.4448	-0.4137	3.0012	-0.2448
0.16	6.3778	-0.4040	2.9974	-0.2447
0.17	6.3077	-0.3945	2.9931	-0.2446
0.18	6.2366	-0.3850	2.9885	-0.2444
0.19	6.1623	-0.3758	2.9836	-0.2442
0.2	6.0872	-0.3668	2.9786	-0.2440
0.22	5.9380	-0.3494	2.9684	-0.2436
0.24	5.7915	-0.3331	2.9580	-0.2431
0.25	5.7213	-0.3253	2.9529	-0.2428
0.26	5.6485	-0.3178	2.9477	-0.2426
0.28	5.5097	-0.3035	2.9376	-0.2421
0.3	5.3744	-0.2900	2.9276	-0.2417
0.32	5.2428	-0.2774	2.9178	-0.2412
0.34	5.1167	-0.2656	2.9082	-0.2408
0.35	5.0563	-0.2600	2.9034	-0.2405
0.36	4.9957	-0.2545	2.8987	-0.2403
0.38	4.8752	-0.2441	2.8894	-0.2399
0.4	4.7604	-0.2342	2.8803	-0.2395
0.45	4.4900	-0.2119	2.8581	-0.2384
0.5	4.2369	-0.1922	2.8367	-0.2374
0.55	4.0027	-0.1747	2.8160	-0.2363
0.6	3.7826	-0.1589	2.7960	-0.2353
0.7	3.3750	-0.1314	2.7580	-0.2333
0.8	3.0078	-0.1078	2.7227	-0.2314
0.9	2.6734	-0.0870	2.6901	-0.2295
1	2.3648	-0.0683	2.6603	-0.2278
1.5	1.1109	0.0068	2.5501	-0.2211
2	0.1818	0.0649	2.4928	-0.2176
3	-1.1016	0.1532	2.4711	-0.2168
4	-1.9306	0.2153	2.4953	-0.2190
5	-2.5042	0.2579	2.5107	-0.2199

Table C-6 Style of Faulting and Standard Error Coefficients for Spectral Ordinates
Using Equations Derived by Idriss (2002)

Period - sec	ϕ	ϵ_{max}	ϵ_1	ϵ_{min}
0.01	0.320	0.720	1.320	0.450
0.03	0.320	0.720	1.320	0.450
0.04	0.320	0.720	1.320	0.450
0.05	0.320	0.720	1.320	0.450
0.06	0.320	0.730	1.330	0.460
0.07	0.320	0.739	1.339	0.469
0.075	0.320	0.743	1.343	0.473
0.08	0.320	0.747	1.347	0.477
0.09	0.320	0.753	1.353	0.483
0.1	0.320	0.760	1.360	0.490
0.11	0.324	0.765	1.365	0.495
0.12	0.327	0.770	1.370	0.500
0.13	0.330	0.775	1.375	0.505
0.14	0.332	0.779	1.379	0.509
0.15	0.335	0.783	1.383	0.513
0.16	0.337	0.787	1.387	0.517
0.17	0.339	0.791	1.391	0.521
0.18	0.341	0.794	1.394	0.524
0.19	0.343	0.797	1.397	0.527
0.2	0.345	0.800	1.400	0.530
0.22	0.348	0.806	1.406	0.536
0.24	0.352	0.811	1.411	0.541
0.25	0.353	0.814	1.414	0.544
0.26	0.355	0.816	1.416	0.546
0.28	0.357	0.820	1.420	0.550
0.3	0.360	0.825	1.425	0.555
0.32	0.360	0.829	1.429	0.559
0.34	0.360	0.832	1.432	0.562
0.35	0.360	0.834	1.434	0.564
0.36	0.360	0.836	1.436	0.566
0.38	0.360	0.839	1.439	0.569
0.4	0.360	0.842	1.442	0.572
0.45	0.360	0.849	1.449	0.579
0.5	0.360	0.856	1.456	0.586
0.55	0.350	0.862	1.462	0.592
0.6	0.340	0.867	1.467	0.597
0.7	0.322	0.877	1.477	0.607
0.8	0.307	0.885	1.485	0.615
0.9	0.294	0.893	1.493	0.623
1	0.282	0.900	1.500	0.630
1.5	0.236	0.900	1.500	0.630
2	0.204	0.900	1.500	0.630
3	0.158	0.900	1.500	0.630
4	0.125	0.900	1.500	0.630
5	0.100	0.900	1.500	0.630

C.5 ATTENUATION RELATIONSHIPS DERIVED BY SADIGH, CHANG, EGAN, MAKDISI, AND YOUNGS (1997)

The following equation was derived by Sadigh et al for spectral ordinates at rock sites:

$$\begin{aligned} \ln(y) = & C_1 + C_2M + C_3(8.5 - M)^{2.5} + C_4\ln[r_{rup} + \exp(C_5 + C_6M)] \\ & + C_7\ln(r_{rup} + 2) \end{aligned} \quad [C-17]$$

y is the median spectral acceleration in g (5% damping), or peak ground acceleration (pga), in g's, M is moment magnitude, r_{rup} is the closest distance to the rupture plane in km, and $C_1...C_7$ are coefficients. The values of the standard error terms are listed in Table C-7. The values of the coefficients $C_1...C_7$ are provided in Table C-8.

Table C-7 Coefficients for Standard Error Terms Using Equations Derived by Sadigh et al (1997)

Period - sec	Standard Error Term	Minimum Value for $M \geq 7.21$
zpa	1.39 – 0.14M	0.38
0.07	1.40 – 0.14M	0.39
0.10	1.41 – 0.14M	0.40
0.20	1.43 – 0.14M	0.42
0.30	1.45 – 0.14M	0.44
0.40	1.48 – 0.14M	0.47
0.50	1.50 – 0.14M	0.49
0.75	1.52 – 0.14M	0.51
≥ 1.00	1.53 – 0.14M	0.52

Table C-8 Coefficients for the Median Spectral Ordinates Using Equations
Derived by Sadigh et al (1997)

Period	C_1	C_2	C_3	C_4	C_5	C_6	C_7
$M \leq 6.5$							
zpa	-0.624	1	0.000	-2.100	1.29649	0.250	0.000
0.03	-0.624	1	0.000	-2.100	1.29649	0.250	0.000
0.07	0.110	1	0.006	-2.128	1.29649	0.250	-0.082
0.1	0.275	1	0.006	-2.148	1.29649	0.250	-0.041
0.2	0.153	1	-0.004	-2.080	1.29649	0.250	0.000
0.3	-0.057	1	-0.017	-2.028	1.29649	0.250	0.000
0.4	-0.298	1	-0.028	-1.990	1.29649	0.250	0.000
0.5	-0.588	1	-0.040	-1.945	1.29649	0.250	0.000
0.75	-1.208	1	-0.050	-1.865	1.29649	0.250	0.000
1	-1.705	1	-0.055	-1.800	1.29649	0.250	0.000
1.5	-2.407	1	-0.065	-1.725	1.29649	0.250	0.000
2	-2.945	1	-0.070	-1.670	1.29649	0.250	0.000
3	-3.700	1	-0.080	-1.610	1.29649	0.250	0.000
4	-4.230	1	-0.100	-1.570	1.29649	0.250	0.000
$M > 6.5$							
zpa	-1.237	1.1	0.000	-2.100	-0.48451	0.524	0.000
0.03	-1.237	1.1	0.000	-2.100	-0.48451	0.524	0.000
0.07	-0.540	1.1	0.006	-2.128	-0.48451	0.524	-0.082
0.1	-0.375	1.1	0.006	-2.148	-0.48451	0.524	-0.041
0.2	-0.497	1.1	-0.004	-2.080	-0.48451	0.524	0.000
0.3	-0.707	1.1	-0.017	-2.028	-0.48451	0.524	0.000
0.4	-0.948	1.1	-0.028	-1.990	-0.48451	0.524	0.000
0.5	-1.238	1.1	-0.040	-1.945	-0.48451	0.524	0.000
0.75	-1.858	1.1	-0.050	-1.865	-0.48451	0.524	0.000
1	-2.355	1.1	-0.055	-1.800	-0.48451	0.524	0.000
1.5	-3.057	1.1	-0.065	-1.725	-0.48451	0.524	0.000
2	-3.595	1.1	-0.070	-1.670	-0.48451	0.524	0.000
3	-4.350	1.1	-0.080	-1.610	-0.48451	0.524	0.000
4	-4.880	1.1	-0.100	-1.570	-0.48451	0.524	0.000

Note that the above coefficients are applicable to ground motions generated by a strike slip event. Sadigh et al suggest that the calculated spectral ordinates be multiplied by a factor of 1.2 for reverse / thrust events.

APPENDIX D
ATTENUATION RELATIONSHIPS FOR MOTIONS
IN EASTERN NORTH AMERICA (ENA)

The attenuation relationships derived by Toro et al (1997) and those by Atkinson & Boore (1997) are summarized in this Appendix.

D.1 ATTENUATION RELATIONSHIPS BY TORO, ABRAHAMSON AND SCHNEIDER (1997)

The functional form adopted by Toro et al is the following:

$$\begin{aligned} \ln(y) = & C_1 + C_2(M - 6) + C_3(M - 6)^2 - C_4 \ln(R_M) \\ & - (C_5 - C_4) \max \left[\ln \left(\frac{R_M}{100} \right), 0 \right] - C_6 R_M \end{aligned} \quad [D-1]$$

$$R_M = \sqrt{R_{jb}^2 + C_7^2} \quad [D-2]$$

in which, y is the median spectral acceleration in g (5% damping) or peak ground acceleration (pga) in g's, M is either Lg magnitude (m_{bLg}) or moment magnitude M , C_1 through C_7 are coefficients that depend on the frequency and on the region under consideration, and R_{jb} is the closest horizontal distance to the rupture surface if this surface is projected to the ground surface (i.e., the Joyner-Boore distance) in km.

Two regions were considered by Toro et al (1997) in deriving attenuation relationships for Eastern North America (ENA), namely the Mid-Continent and the Gulf Crustal Regions. The extent of each region is depicted in Fig. D-1. The coefficients $C_1 \dots C_7$ for various frequencies and for zpa and applicable to each region are listed in Table D-1 for equations using moment magnitude and for equations using Lg magnitude.

D.2 ATTENUATION RELATIONSHIPS BY ATKINSON AND BOORE (1997)

The following functional form was used by Atkinson & Bore (1997) to calculate the median spectral acceleration

$$\ln(y) = C_1 + C_2(M - 6) + C_3(M - 6)^2 - \ln(R) - C_4 R \quad [D-3]$$


in which, y is the median spectral acceleration in g (5% damping) or peak ground acceleration (pga) in g's, M is moment magnitude C_1 through C_4 are coefficients that depend on frequency, and R is the hypocentral distance in km. The coefficients $C_1 \dots C_4$ for various frequencies and for pga are listed in Table D-2.

Table D-1 Coefficients of Attenuation Equations Derived by Toro et al (1997)

Frequency (Hz)	Coefficient						
	C_1	C_2	C_3	C_4	C_5	C_6	C_7
<i>Mid-Continent Region – Equations Using Moment Magnitude</i>							
0.5	-0.74	1.86	-0.31	0.92	0.46	0.0017	6.9
1	0.09	1.42	-0.20	0.90	0.49	0.0023	6.8
2.5	1.07	1.05	-0.10	0.93	0.56	0.0033	7.1
5	1.73	0.84	0	0.98	0.66	0.0042	7.5
10	2.37	0.81	0	1.10	1.02	0.0040	8.3
25	3.68	0.80	0	1.46	1.77	0.0013	10.5
35	4.00	0.79	0	1.57	1.83	0.0008	11.1
pga	2.20	0.81	0	1.27	1.16	0.0021	9.3
<i>Mid-Continent Region – Equations Using L_g Magnitude</i>							
0.5	-0.97	2.52	-0.47	0.93	0.60	0.0012	7.0
1	-0.12	2.05	-0.34	0.90	0.59	0.0019	6.8
2.5	0.90	1.70	-0.26	0.94	0.65	0.0030	7.2
5	1.60	1.24	0	0.98	0.74	0.0039	7.5
10	2.36	1.23	0	1.12	1.05	0.0043	8.5
25	3.54	1.19	0	1.46	1.84	0.0010	10.5
35	3.87	1.19	0	1.58	1.90	0.0005	11.1
pga	2.07	1.20	0	1.28	1.23	0.0018	9.3
<i>Gulf Region – Equations Using Moment Magnitude</i>							
0.5	-0.81	-1.60	-0.26	0.74	0.71	0.0025	6.6
1	0.24	-0.60	-0.15	0.79	0.82	0.0034	7.2
2.5	1.64	0.80	-0.08	0.99	1.27	0.0036	8.9
5	3.10	2.26	0	1.34	1.95	0.0017	11.4
10	5.08	4.25	0	1.87	2.52	0.0002	14.1
25	5.19	4.35	0	1.96	1.96	0.0004	12.9
35	4.81	3.97	0	1.89	1.80	0.0008	11.9
pga	2.91	2.07	0	1.49	1.61	0.0014	10.9
<i>Gulf Region – Equations Using L_g Magnitude</i>							
0.5	-1.01	2.38	-0.42	0.75	0.83	0.0032	6.8
1	0.06	1.97	-0.32	0.80	0.92	0.0030	7.3
2.5	1.49	1.74	-0.26	1.00	1.36	0.0032	9.0
5	3.00	1.31	0	1.35	2.03	0.0014	11.4
10	4.65	1.30	0	1.78	2.41	0.0000	13.8
25	5.08	1.29	0	1.97	2.04	0.0000	12.9
35	4.68	1.30	0	1.89	1.88	0.0005	11.9
pga	2.80	1.31	0	1.49	1.68	0.0017	10.9

Table D-2 Coefficients of Attenuation Equations Derived by Atkinson & Boore (1997)

Frequency (Hz)	Coefficient			
	C_1	C_2	C_3	C_4
0.5	-1.660	1.460	-0.039	0
0.8	-0.900	1.462	-0.071	0
1.0	-0.508	1.428	-0.094	0
1.3	-0.094	1.391	-0.118	0
2.0	0.620	1.267	-0.147	0
3.2	1.265	1.094	-0.165	0.00024
5.0	1.749	0.963	-0.148	0.00105
7.9	2.140	0.864	-0.129	0.00207
10	2.301	0.829	-0.121	0.00279
13	2.463	0.797	-0.113	0.00352
20	2.762	0.755	-0.110	0.00520
pga	1.841	0.686	-0.123	0.00311

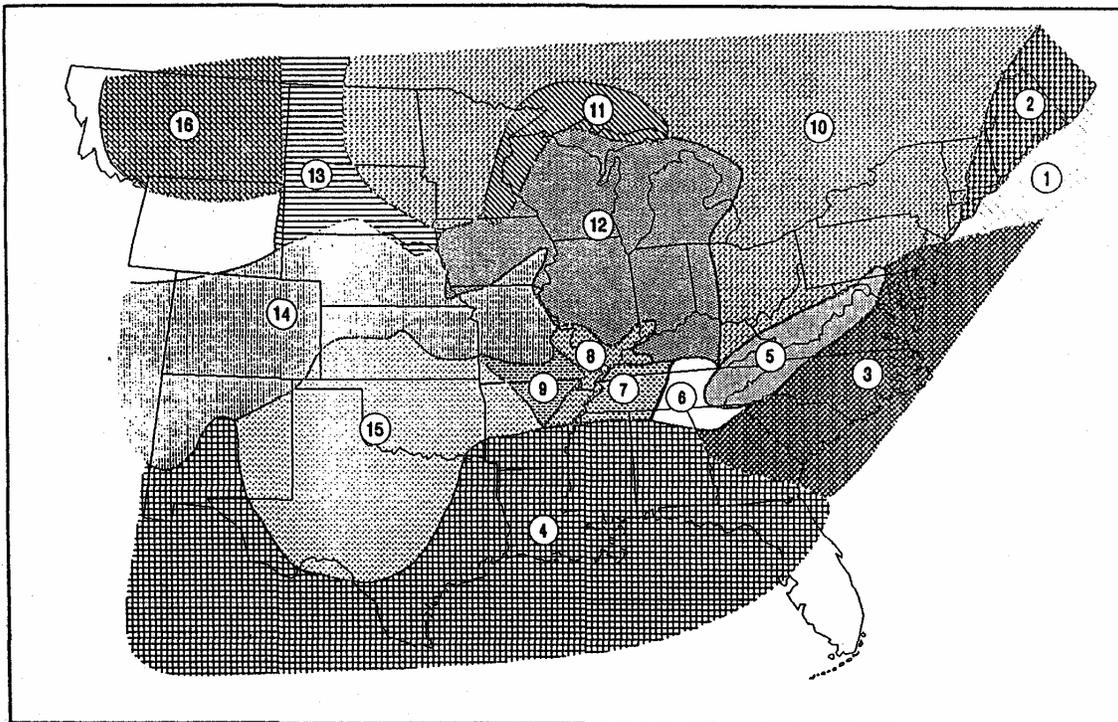

Regionalization of crustal structure for CENA. Attenuation equations are developed for the Mid-continent and Gulf crustal regions (regions 12 and 4, respectively). The equations for the Mid-continent are applicable to regions 1 through 3 and 5 through 16

Fig. D-1 Regions Considered by Toro et al (1997) in Deriving Attenuation Relationships for Eastern North America (ENA)

APPENDIX E ATTENUATION RELATIONSHIPS FOR SUBDUCTION EARTHQUAKES

The attenuation relationships derived by Youngs et al (1997) and those by Atkinson & Boore (2003) are summarized in this Appendix.

E.1 ATTENUATION RELATIONSHIPS DERIVED BY YOUNGS, CHIOU, SILVA AND HUMPHREY (1997)

The following attenuation relationship was derived by Youngs et al (1997):

$$\ln(y) = 0.2418 + 1.414M + C_1 + C_2(10 - M)^3 + C_3 \ln(R_{rup} + C_M) + 0.00607H + 0.3846Z_r \quad [E-1]$$

$$C_M = 1.7818 \exp(0.554M) \quad [E-2]$$

$$\text{Standard error term, } SE = C_4 + C_5M \quad [E-3]$$

y is spectral acceleration in g's, M is moment magnitude, R_{rup} is closest distance from site to rupture surface in km, H is depth in km, and $Z_r = 0$ for interface events (such as the Cascadia Zone) and $Z_r = 1$ for intra-slab events (such as the Juan de Fuca).

Note that for magnitudes greater than 8, the **SE** term for $M = 8$ is to be used.

The values of the coefficients $C_1 \dots C_5$ are listed in Table E-1.

Table E-1 Coefficients of Attenuation Equations Derived by Young et al (1997)

Period - sec	C_1	C_2	C_3	C_4	C_5
0.01	0	0	-2.552	1.45	-0.1
0.075	1.275	0	-2.707	1.45	-0.1
0.1	1.188	-0.0011	-2.655	1.45	-0.1
0.2	0.722	-0.0027	-2.528	1.45	-0.1
0.3	0.246	-0.0036	-2.454	1.45	-0.1
0.4	-0.115	-0.0043	-2.401	1.45	-0.1
0.5	-0.400	-0.0048	-2.360	1.45	-0.1
0.75	-1.149	-0.0057	-2.286	1.45	-0.1
1	-1.736	-0.0064	-2.234	1.45	-0.1
1.5	-2.634	-0.0073	-2.160	1.50	-0.1
2	-3.328	-0.0080	-2.107	1.55	-0.1
3	-4.511	-0.0089	-2.033	1.65	-0.1

E.2 ATTENUATION RELATIONSHIPS DERIVED BY ATKINSON AND BOORE (2003)

APPENDIX F

EFFECTS OF RUPTURE DIRECTIVITY ON EARTHQUAKE GROUND MOTIONS

F.1 INTRODUCTION

Rupture directivity effects can lead to large long period pulses in the ground motion. Recently, models have been developed to quantify the directivity effect (e.g. Somerville et al, 1997). With these models of the rupture directivity effect, directivity can be included in either deterministic or probabilistic seismic hazard analyses. This paper demonstrates the effect of rupture directivity on probabilistic seismic hazard analyses.

F.2 ATTENUATION RELATIONS AND RUPTURE DIRECTIVITY

For design of long-period structures such as bridges, characterization of long-period motion is essential. Attenuation relations commonly used in California do not explicitly include rupture directivity effects but they can be adjusted to account for near-fault directivity effects using the Somerville et al. (1997) fault-rupture directivity model. The Somerville et al. (1997) model comprises two period-dependent scaling factors that may be applied to horizontal attenuation relationship. One of the factors accounts for the change in shaking intensity in the average horizontal component of motion due to near-fault rupture directivity effects (higher ground motions for rupture toward the site and lower ground motions for rupture away from the site). The second factor reflects the directional nature of the shaking intensity using two ratios: fault normal (FN) and fault parallel (FP) versus the average (FA)

APPENDIX G
EFFECTS OF HANGING WALL/FOOTWALL ON EARTHQUAKE GROUND
MOTIONS

APPENDIX H
ESTIMATION OF TARGET SPECTRUM AT
SPECTRAL DAMPING RATIOS OTHER THAN 5%

The equations listed in Appendices C through E are for a spectral damping ratio of 5%. Attenuation relationships at other damping ratios have not usually been derived. Instead, a factor to adjust from 5% damping to other damping ratios is used. For example, Newmark and Hall (1981) provided the following relationships for the median spectral amplification factors (**SAF**):

Region	Approximate Range of Periods, T - sec	Spectrum Amplification Factor (SAF)	SAF Normalized with respect to $\beta = 5\%$
Acceleration	$0.125 \leq T < 0.3$ to 0.4	$3.21 - 0.68\text{Ln}(\beta)$	$1.517 - 0.321\text{Ln}(\beta)$
Velocity	0.3 to $0.4 \leq T < 1.5$ to 3	$2.31 - 0.41\text{Ln}(\beta)$	$1.40 - 0.248\text{Ln}(\beta)$
Displacement	$T \geq 1.5$ to 3	$0.82 - 0.27\text{Ln}(\beta)$	$1.314 - 0.195\text{Ln}(\beta)$

Note: The approximate range of periods listed above depends on the values selected for peak particle acceleration, velocity and displacement.

For example, the spectral ordinates shown in Fig. H-1 are for peak particle acceleration of 1 g, v/a ratio equal to 75 cm/sec/g and a value of ad/v^2 equal to 4; the resulting range of periods is as follows:

Acceleration Region: $0.125 \leq T < 0.35$ to 0.4
 Velocity Region: 0.35 to $0.4 \leq T < 1.5$ to 1.7
 Displacement Region: $T \geq 1.5$ to 1.7

The values of $v/a = 75$ and $ad/v^2 = 4$ were selected to represent motions at a rock site generated by a nearby earthquake having a magnitude of about $6\frac{1}{2}$ to $7\frac{1}{2}$.

Recordings from the San Fernando (SF) and the Imperial Valley (IV) earthquakes were also used to derive adjustment factors normalized with respect to 5 percent spectral damping. Expressions similar to those utilized by Newmark and Hall (1981) were used to derive the coefficients for two sets of expressions. One set relates spectral values at damping ratios less than 5 percent to spectral values at damping of 5 percent, and the other set for spectral damping ratios higher than 5 percent. Thus,

$$\text{Ratio} = a_1 - b_1\text{Ln}(\beta) \quad \text{for } \beta \leq 5\% \quad [\text{F-1}]$$

$$\text{Ratio} = a_2 - b_2\text{Ln}(\beta) \quad \text{for } \beta \geq 5\% \quad [\text{F-2}]$$

The values of the coefficients a_1, b_1, a_2 and b_2 for a selected number of periods are listed Table H-1

Table H-1 Parameters a_1, b_1, a_2 and b_2

Period - sec	a_1	b_1	a_2	b_2
0.03	1	0	1	0
0.05	1.1142	0.0709	1.083	0.0505
0.075	1.3513	0.2183	1.2902	0.1803
0.1	1.4918	0.3056	1.4179	0.2597
0.15	1.5796	0.3601	1.4992	0.3102
0.2	1.6148	0.382	1.534	0.3318
0.25	1.6148	0.382	1.534	0.3318
0.3	1.6148	0.382	1.534	0.3318
0.35	1.606	0.3765	1.5224	0.3246
0.4	1.5972	0.3711	1.5108	0.3174
0.5	1.5796	0.3605	1.4992	0.3102
0.6	1.5445	0.3383	1.4876	0.303
0.7	1.5269	0.3274	1.4876	0.303
0.8	1.5094	0.3165	1.476	0.2958
0.9	1.4918	0.3056	1.469	0.2914
1	1.4742	0.2947	1.4644	0.2885
1.5	1.4391	0.2728	1.4644	0.2885
2	1.4216	0.2619	1.4644	0.2885
3	1.404	0.251	1.4644	0.2885
4	1.404	0.251	1.4644	0.2885
5	1.404	0.251	1.4644	0.2885

Note: The values of the parameters a_1, b_1, a_2 and b_2 given above are reported up to the fourth decimal point to provide smooth curves for the calculated spectral ratios; this degree of precision does not imply any increase in accuracy.

Values of the spectral ordinates for damping ratios of 2, 4, 7 and 10% divided by those for a damping ratio of 5% are presented in Fig. H-2 using the above equations and the corresponding values of the coefficients a_1, b_1, a_2 and b_2 . Also shown in Fig. H-2 are the values using the expressions proposed by Newmark and Hall for a peak acceleration of 1 g, $v/a = 75$ and $ad/v^2 = 4$. The results shown in Fig. H-2 indicate that the relationships proposed by Newmark and Hall and the expressions based on recorded data provide comparable results. Therefore, either set of equations can be used for obtaining target spectra at damping ratios other than 5 percent.

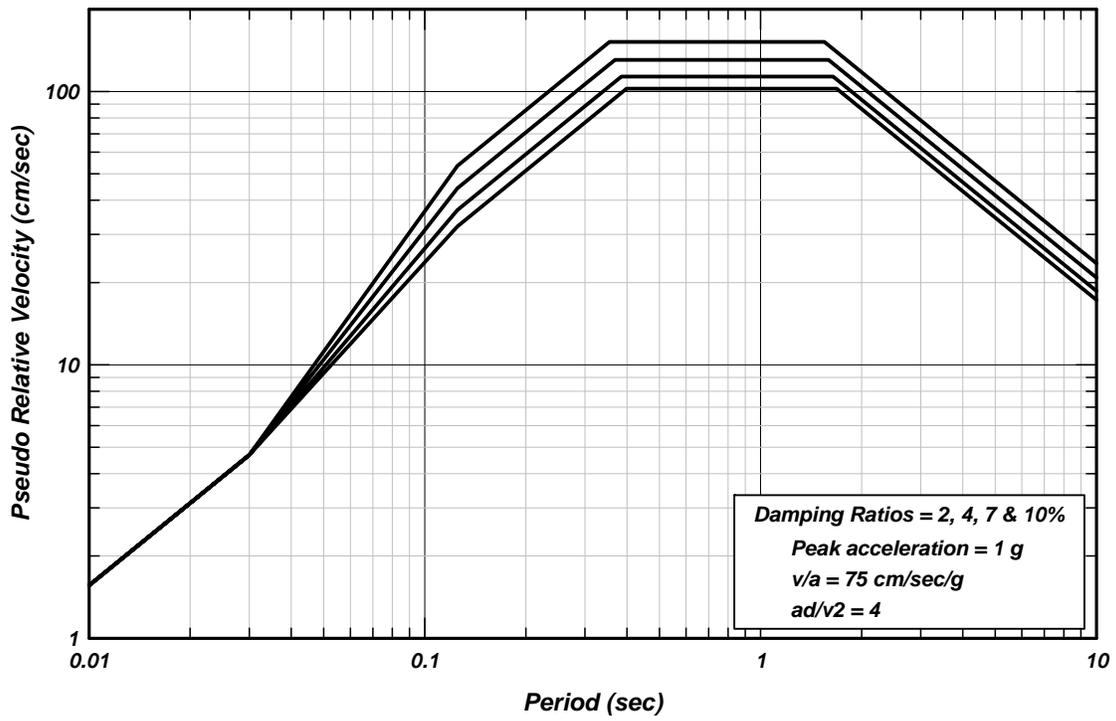


Fig. H-1 Spectral Shapes Using Relationships Proposed by Newmark & Hall (1981)

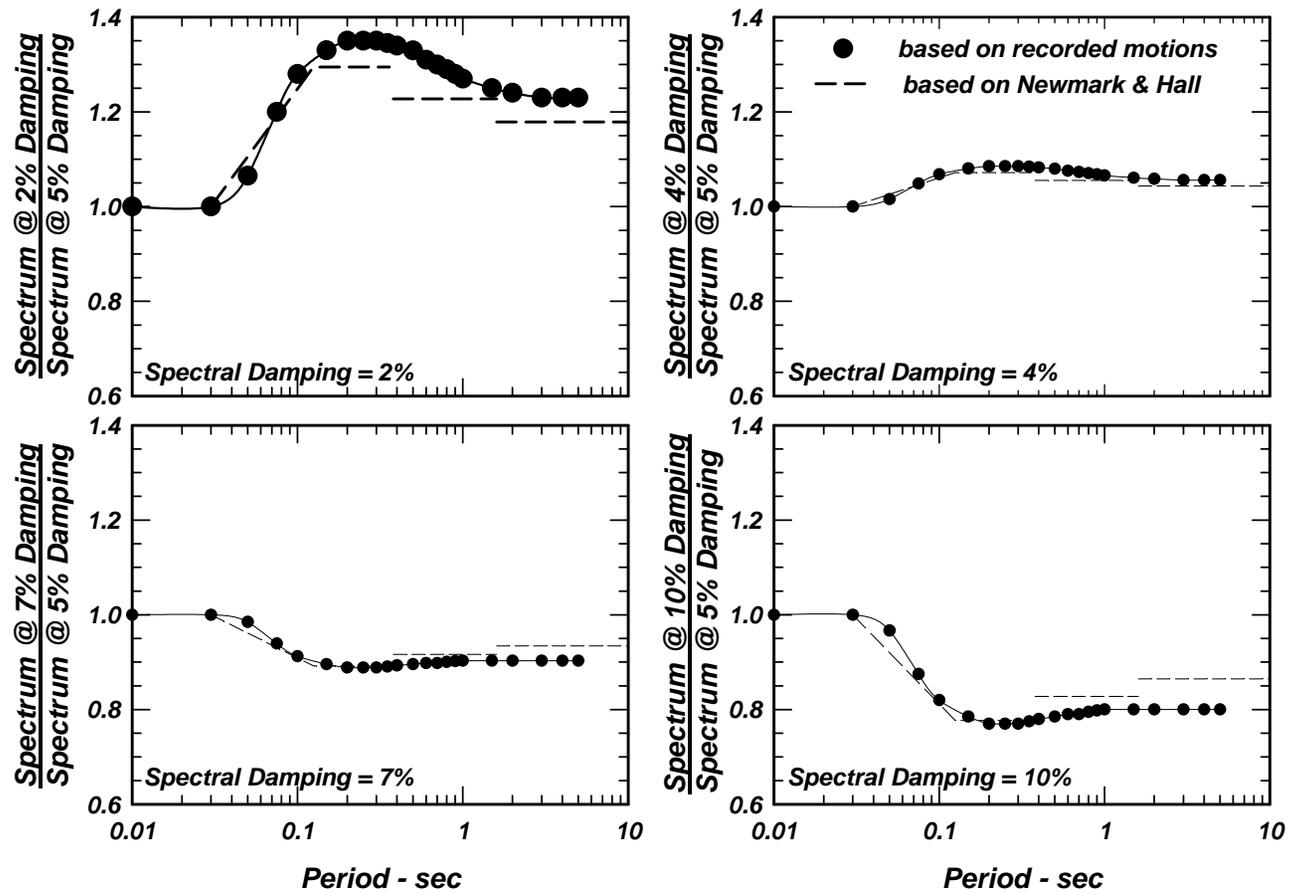


Fig. H-2 Variations of Spectral Ordinates with Spectral Damping Ratio

**APPENDIX I
ANALYTICAL SIMULATIONS TO GENERATE ACCELEROGRAMS
AT A ROCK SITE**

I.1 INTRODUCTION

APPENDIX J

SELECTION OF ACCELEROGRAMS FOR SEISMIC ANALYSIS PURPOSES

J.1 INTRODUCTION

There are several procedures that can be used to select earthquake ground motions at a rock site. These procedures include:

- (a) Utilization of motions previously recorded at rock sites during similar size earthquakes and at distances comparable to those under consideration;
- (b) Estimation of a target spectrum and then selection of natural time histories whose spectral ordinates are comparable to those of the target spectrum for the period range of interest;
- (c) Estimation of a target spectrum and then generation of a synthetic time history whose spectral ordinates provide a reasonable envelope to those of the target spectrum; or
- (d) Use of simulation techniques starting with the source and propagating the appropriate wave forms to generate a suite of time histories that can then be used to represent the earthquake ground motions at the rock site of interest.

Procedure (a) is difficult to utilize at most locations because the number of recorded motions is not extensive enough to cover a sufficiently wide range of possibilities. Procedure (d) is summarized in Appendix H. Procedures (b) and (c) are summarized below.

J.2 SELECTION OF NATURAL TIME HISTORIES

As noted above, either natural time histories or a synthetic time history can be used to represent the target spectrum. If these time histories are to be used in conjunction with a nonlinear analysis, then natural time histories would be preferable. Time histories recorded during several earthquakes are available from several web sites including the USGS; ROSRINE, the California Division of Mines and Geology (CDMG), the California Earthquake Engineering Research center (PEER).

When using natural time histories, it is suggested that at least three time histories, and possibly as many as seven, be used in the analyses. An example of this selection process is provided later in this report.

J.3 GENERATION OF SYNTHETIC TIME HISTORIES

Starting with a recorded motion, it is possible to modify the amplitudes of this motion so that its spectral ordinates are essentially equal to those of the target spectrum. There are a few computer programs that incorporate a procedure to modify the Fourier amplitudes of a given time history so that the response spectrum of the modified time history provides a reasonable estimate of the target spectrum. The program was developed by Silva and Lee (1987); details regarding the procedures used, a computer program listing and a user's guide are included in the publication by Silva and Lee. An example of a time history generated using this program is provided later in this report.

J.4 EXAMPLES

[To Be Completed]

APPENDIX K INVENTORY OF SELECTED ACCELEROGRAMS

This appendix will contain 5 to 10 accelerograms in each of the following magnitude range: 5 ± 0.5 , 6 ± 0.5 , 7 ± 0.5 , and some subduction zone events. The following information will be provided for each accelerogram:

Plots of acceleration, velocity & displacement versus time

Plots of spectral ordinates (5% damping).

Husid plot (for estimating duration).

Fourier amplitudes versus frequency.